



Amana® 16 cu. ft. Upright Freezer with Energy-Saving Insulation

AZF33X16DW

Available Finishes/Colours

☐ AZF33X16DW
White

This 16 cu. ft. Amana® Upright Freezer comes with Energy-Saving Insulation, which helps lower the global warming potential of your freezer by 99.9%. You can also chill large amounts of food by using the Fast Freeze Option, which can cool down the entire freezer.

- Top Features
- Fast Freeze Option
- DeepFreeze® Technology
- Energy-Saving Insulation

- Manuals & Literature:
- [Dimension Guide](#)
 - [Energy Guide](#)
 - [Owner Manual](#)
 - [Warranty Information](#)

Dimensions		Specifications	
Height	60.75	Extended Service Plan Parent	EW04IW2Y
Width	30.25	Product To Product Pairs	AGR6603SFW
Depth	29.13		
Controls		Electrical	
Control Location	Interior	Volts	115
Control Type	Electronic	Exterior	
Door Ajar Open Alarm	No	Handle Material	Plastic
Defrost Type	Automatic Defrost	Door Finish	Textured
Temperature Monitor Alarm	No	Door Opening	Right Swing
Temperature Range	15.8 F to -15.3 F (-9.3 C to -26.3C)	Door Style	Contour
		Hidden Hinge	Yes
		Reversible Door	Yes
		Defrost Drain	No
Specifications		Freezer Door Lock	No
Country Of Origin	USA	Freezer Handle Type	Pocket Handle

PRODUCT MODEL NUMBERS


AZF33X16D	AZF33X18D
AZM12X17D	AZB33X20D
AZB33X18D	AZF33X20D

Recommended grounding method
A 115 Volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your freezer be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure
A cold water supply with water pressure of between 30 and 120 psi (207 to 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, see “Troubleshooting” or call a licensed, qualified plumber.


Reverse Osmosis Water Supply
If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

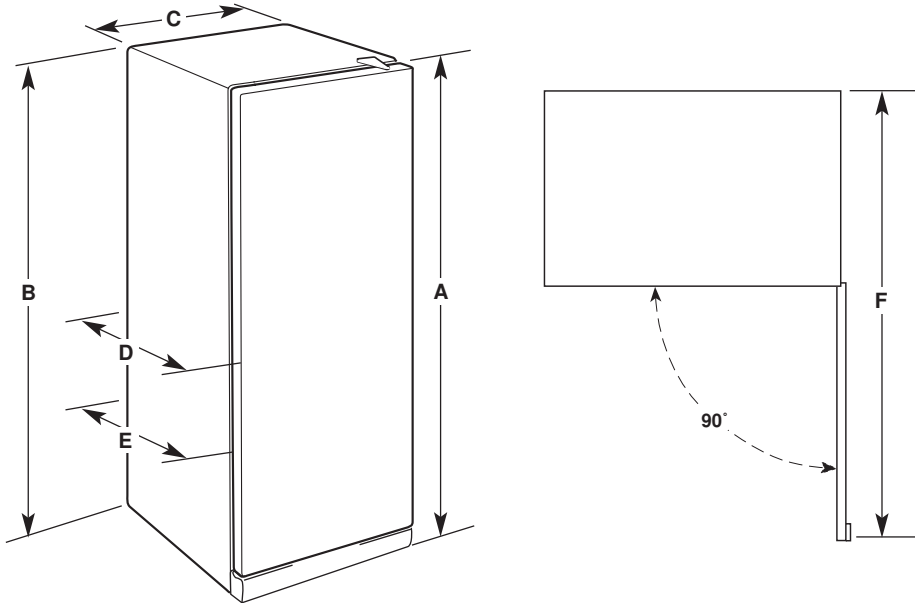

Model Number	Model Size	Reversible Door	Height (Overall) "A"	Height (Top of Cabinet) "B"	Width (Overall) "C"	Depth (Overall) "D"	Depth (Cabinet Only) "E"	Depth (Door Opens 90°) "F"
AZF33X16D	15.7 cu. ft.	Yes	60 ³ / ₈ " (154.3 cm)	60 ¹ / ₂ " (153.0 cm)	30 ¹ / ₂ " (76.8 cm)	29 ¹ / ₂ " (74.0 cm)	24 ⁵ / ₈ " (62.6 cm)	55 ⁷ / ₈ " (142.0 cm)
AZM12X17D	16.6 cu. ft.	Yes	66 ³ / ₈ " (169.6 cm)	66 ¹ / ₂ " (168.3 cm)	30 ¹ / ₂ " (76.8 cm)	29 ¹ / ₂ " (74.0 cm)	24 ⁵ / ₈ " (62.6 cm)	55 ⁷ / ₈ " (142.0 cm)
AZB33X18D AZF33X18D	17.7 cu. ft.	Yes	66 ³ / ₈ " (169.6 cm)	66 ¹ / ₂ " (168.3 cm)	30 ¹ / ₂ " (76.8 cm)	29 ¹ / ₂ " (74.0 cm)	24 ⁵ / ₈ " (62.6 cm)	55 ⁷ / ₈ " (142.0 cm)
AZB33X20D AZF33X20D	19.6 cu. ft.	Yes	66 ³ / ₈ " (169.6 cm)	66 ¹ / ₂ " (168.3 cm)	33 ¹ / ₂ " (84.5 cm)	29 ¹ / ₂ " (74.0 cm)	24 ⁵ / ₈ " (62.6 cm)	58 ⁷ / ₈ " (149.6 cm)

LOCATION REQUIREMENTS

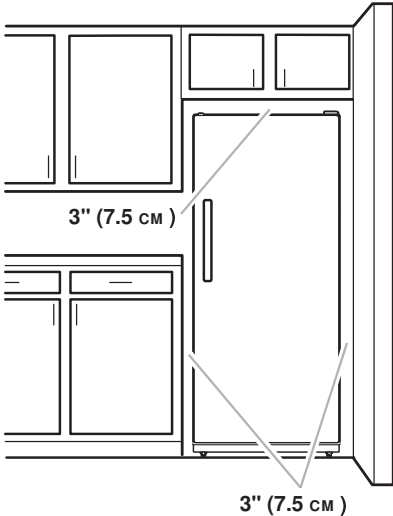

IMPORTANT: Do not install the freezer near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 40°F (5°C).

Check the strength of the floor before installing your freezer. It should hold the weight of a freezer fully loaded with food.

Allow at least 3" (7.5 cm) of air space at the top and on both sides of the freezer and 1" (2.5 cm) between the back of the freezer and the wall. If the freezer is to be against a wall, leave extra space on the hinge side so the door can open wider.

NOTE: This freezer may be installed side by side with another refrigerator or freezer. Allow for a 3" (7.5 cm) clearance at the top and sides and a ¼" (0.64 cm) clearance between the appliances.