Coast Appliances marketing@coastappliances.com





Amana® 18 cu. ft. Upright Freezer with Free-O-Frost™ System

AZF33X18DW

Available Finishes/Colours

AZF33X18DW White

Dimensions		Specifications			
Depth	29.13	Extended Service Plan Parent	EW05IW2Y AGR6603SFW		
Height	66.75				
Width	30.25	Product To Product Pairs			
Controls		Exterior			
Control Location	Interior	Handle Material	Plastic		
		Door Finish	Textured		
Control Type	Electronic	Door Opening	Right Swing		
Door Ajar Open Alarm	No	Door Style	Contour		
Defrost Type	Automatic				
	Defrost	Hidden Hinge	Yes		
Temperature Monitor Alarm	No	Reversible Door	Yes		
Alarm		Defrost Drain	No		
Temperature Range	15.8 F to - 15.3 F (-9.3 C	Freezer Door Lock	No		
. cpor acare mange	to -26.3C)		D 1 1		
		Freezer Handle Type	Pocket Handle		
Specifications					
Country Of Origin	USA	Freezer Compartment			
		Door Bins	6 Fixed Full- Width		

Worried about your freezer looking too much like an igloo? This 18 cu. ft. Amana® Upright Freezer helps prevent ice buildup with the Free-O-Frost™ System. Use the Fast Freeze Option for when you have a lot to stock after your last shopping spree.

Top Features
Fast Freeze Setting
DeepFreeze® Technology
Revolutionary Insulation

Manuals & Literature:

Dimension Guide Energy Guide





PRODUCT MODEL NUMBERS

AZF33X16D AZF33X18D AZM12X17D AZB33X20D AZB33X18D AZF33X20D


Recommended grounding method A 115 Volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your freezer be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure

A cold water supply with water pressure of between 30 and 120 psi (207 to 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, see "Troubleshooting" or call a licensed, qualified plumber.


Reverse Osmosis Water Supply
If a reverse osmosis water filtration
system is connected to your cold water
supply, the water pressure to the
system needs to be a minimum of
40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

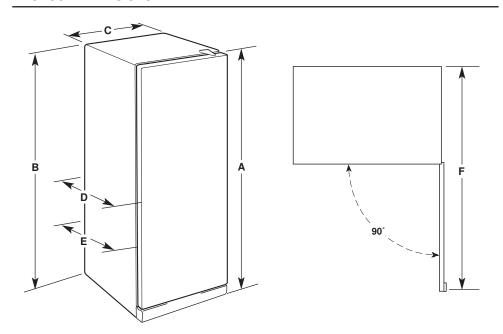

Model Number	Model Size	Reversible Door	Height (Overall) "A"	Height (Top of Cabinet) "B"	Width (Overall) "C"	Depth (Overall) "D"	Depth (Cabinet Only) "E"	Depth (Door Opens 90°) "F"
AZF33X16D	15.7 cu. ft.	Yes	60 ³ /" (154.3 cm)	60½" (153.0 cm)	30 ¹ /" (76.8 cm)	29 ¹ /" (74.0 cm)	24 ⁵ /" (62.6 cm)	55 ⁷ /" (142.0 cm)
AZM12X17D	16.6 cu. ft.	Yes	66 ³ /" (169.6 cm)	66½" (168.3 cm)	30 ¹ /" (76.8 cm)	29 ¹ /" (74.0 cm)	24 ⁵ /" (62.6 cm)	55 ⁷ /" (142.0 cm)
AZB33X18D AZF33X18D	17.7 cu. ft.	Yes	66 ³ /" (169.6 cm)	66 ¹ /" (168.3 cm)	30 ¹ /" (76.8 cm)	29 ¹ /" (74.0 cm)	24 ⁵ /" (62.6 cm)	55 ⁷ /" (142.0 cm)
AZB33X20D AZF33X20D	19.6 cu. ft.	Yes	66 ³ /" (169.6 cm)	66 ¹ /" (168.3 cm)	33 ¹ /" (84.5 cm)	29 ¹ /" (74.0 cm)	24 ⁵ /" (62.6 cm)	58 ⁷ /" (149.6 cm)

LOCATION REQUIREMENTS

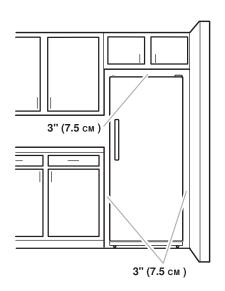

IMPORTANT: Do not install the freezer near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 40°F (5°C).

Check the strength of the floor before installing your freezer. It should hold the weight of a freezer fully loaded with food.

Allow at least 3" (7.5 cm) of air space at the top and on both sides of the freezer and 1" (2.5 cm) between the back of the freezer and the wall. If the freezer is to be against a wall, leave extra space on the hinge side so the door can open wider.

NOTE: This freezer may be installed side by side with another refrigerator or freezer. Allow for a 3'' (7.5 cm) clearance at the top and sides and a 1/4'' (0.64 cm) clearance between the appliances.