

Designed with simplicity in mind, the BU2 range hood models are made to exacting standards and offer the most for the money.

SIZE	WHITE	WHITE WITH BLACK CONTROL	BLACK	STAINLESS	GREASE FILTER (replacement)	CHARCOAL FILTER
24 in.	-	BU224WH	BU224BL	BU224SS	BP29	41F
30 in.	BU230WW	BU230WH	BU230BL	BU230SS	BP29	41F

HVI PERFORMANCE				
Duct Orientation	Size	Damper	Sones on high speed	CFM on high speed
Vertical - Rectangular	3¼ in. x 10 in.	Included	6.5	160
Horizontal - Rectangular	3¼ in. x 10 in.	Included	6.5	160

FEATURES	
Max. Blower CFM*	210
Control type	2-speed rocker switch
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
Lighting	1-level 75-watt bulb (not included)
Grease Filter	Aluminum (Qty. 1)
ENERGY STAR®	no
Recirculation	Charcoal filter sold separately



AC INPUT	
120 V, 60 Hz - 2.5 AMPS	

OPTIONAL ACCESSORIES	
3¼ in. x 10 in. to 6-in. Round Duct Transition	411
7-in. Round Damper	BP87Q
7-in. Round Adapter Plate	SR680508

MOUNTING HEIGHT	
18 in. to 24 in. from cooktop to bottom of hood	

LIMITED WARRANTY	
1-year (See installation manual for full warranty text.)	

**FOR INDOOR USE ONLY**

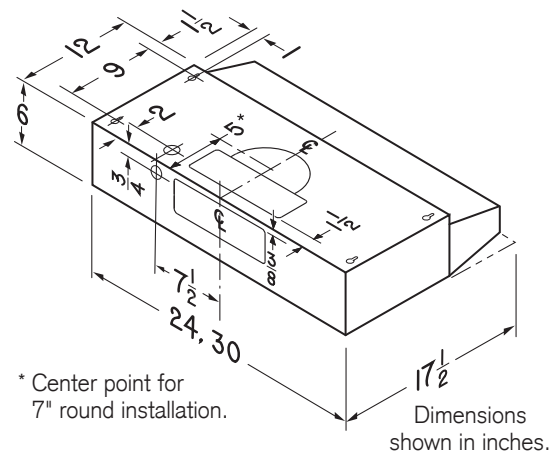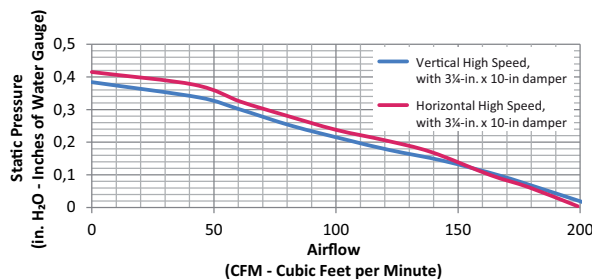

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

\* Max. blower CFM indicates the performance of the hood blower in open air.

99045919E

Conçues en toute simplicité, les hottes de cuisinière de la série BU2 sont fabriquées selon des normes rigoureuses et en offrent davantage pour leur prix.

LARGEUR	BLANC	BLANC AVEC COMMANDE NOIRE	NOIR	INOX	FILTRE À GRAISSES (remplacement)	FILTRE AU CHARBON
24 po	-	BU224WH	BU224BL	BU224SS	BP29	41F
30 po	BU230WW	BU230WH	BU230BL	BU230SS	BP29	41F

RENDEMENT HVI				
Orientation du conduit	Largeur	Volet	Sones en haute vitesse	pi <sup>3</sup> /min en haute vitesse
Rectangulaire vertical	3¼ po x 10 po	inclus	6,5	160
Rectangulaire horizontal	3¼ po x 10 po	inclus	6,5	160

CARACTÉRISTIQUES	
Puissance max. du ventilateur*	210 pi <sup>3</sup> /min
Type de commande	À bascule, à 2 vitesses
Arrêt différé	non
Rappel d'entretien des filtres	non
Détecteur Heat Sentry <sup>MC</sup>	non
Éclairage	1 intensité, ampoule de 75 watts (non incluse)
Filtres à graisses	Aluminium (qté 1)
ENERGY STAR®	non
Recirculation	Filtre au charbon vendu séparément

#### ALIMENTATION CA

120 V, 60 Hz - 2,5 A

#### ACCESSOIRES OPTIONNELS

Transition de 3¼ po x 10 po à 6 po rond	411
Volet rond de 7 po	BP87Q
Plaque pour conduit rond 7 po	SR680508

#### HAUTEUR DE MONTAGE


De 18 po à 24 po au-dessus de la surface de cuisson

#### GARANTIE LIMITÉE

1 an

(Voir le manuel d'installation pour le texte complet de la garantie.)

#### POUR UTILISATION À L'INTÉRIEUR SEULEMENT

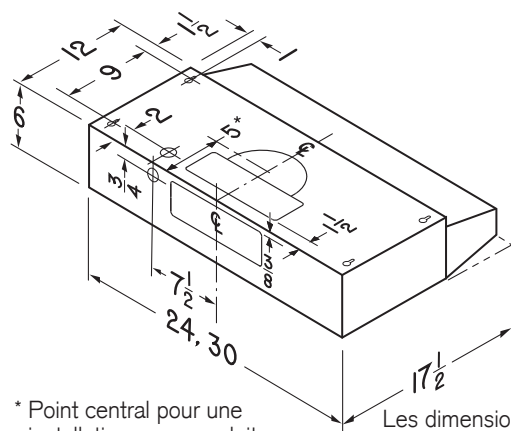

\* Point central pour une installation avec conduit rond de 7 po.

Les dimensions indiquées sont en pouces.

