

## SC(B)514

The SC(B)514 makes a statement of strength and power with a bold frame and 550 CFM fan. Features mesh or baffle filters, two bright LED lights, and a three-speed panel for total control. It is also fitted with a time-delay OFF feature for up to nine minutes.

### Green Features



3 Speed Push  
Button Control



Long-lasting  
LED lights



Grease Cup



Time-Delay  
OFF Feature

### Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick Aluminium fan blades
- 3 speed push button control
- 2 LED lights ( 2 x 1.4W, 4000K)
- Quick release Aluminium Mesh/ Stainless Steel Baffle filters
- Standard chimney flue fits upto 9 ft. ceiling
- Plug in connection



### Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts
- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower
- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones Max. 6 Sones

### Options

- Filters: Aluminium Mesh Filters, Baffle Filters
- Chimney Flues: B2.CH16 - short (7'-8' ceilings)  
B2.CH22 - standard (8'-9' ceilings)  
B2.CH32 - extended (9'-11' ceilings)
- Widths: 30", 36"

**Cyclone** <sup>TM</sup>

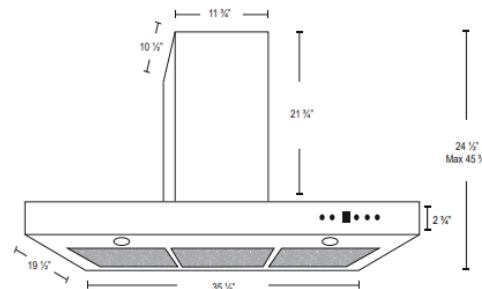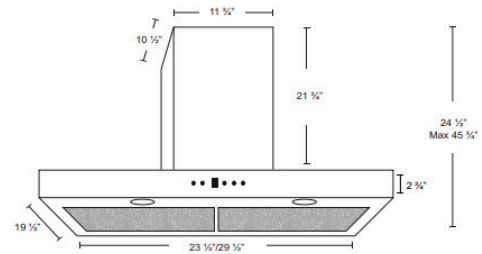

Model	Colour	Ducting	Filters	Size	CFM
SC51424	Stainless Steel	6"	Mesh	24"	550
SC51430	Stainless Steel	6"	Mesh	30"	550
SC51436	Stainless Steel	6"	Mesh	36"	550
SCB51424	Stainless Steel	6"	Baffle	24"	550
SCB51430	Stainless Steel	6"	Baffle	30"	550
SCB51436	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods

www.CycloneRangeHoods.com

Toll free- 888.293.5662