

# Dual Fuel Range, 48", 6 Burners with Griddle

Series 9 | Professional

Stainless Steel | Natural gas




A striking addition to your kitchen, with six gas burners, griddle, and two convection ovens for a combined capacity of 6.9 cu ft.

- Top burner heat of 23,500 BTU, for seriously fast boiling
- 6.9 cu ft total oven capacity across two oven cavities
- Non-tip full-extension shelves in main cavity for safe removal of hot dishes

## DIMENSIONS

Height	35 3/4 - 36 3/4"
Width	47 7/8"
Depth	29 1/8"

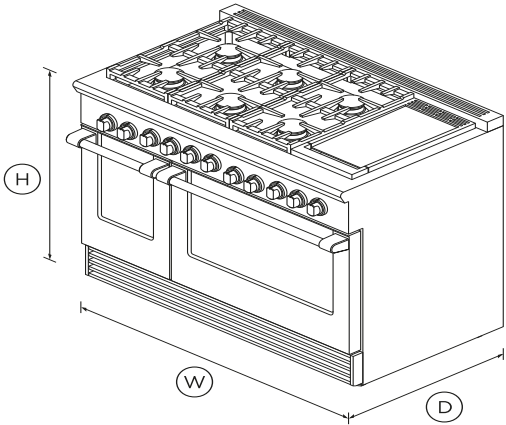

## FEATURES & BENEFITS

### COOKTOP POWER

Sealed Dual Flow Burners™ deliver cooktop power up to 23,500 BTU (NG models) for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

### TOTAL CONTROL

Precise control across high and low settings is delivered through the halo-illuminated cooktop dials. The ovens have true convection and electronic oven control for precise and consistent temperatures.

### CONSISTENT BROILING

The Dual Fuel Range broiler provides an even heat that covers a very large surface area — perfect for browning a fully loaded oven tray.

### EASY TO CLEAN

The Dual Fuel Range oven has a self-cleaning function and removable side racks. The cooktop has sealed burners and an encapsulated cooking surface with a commercial-style stainless steel finish.

### INSTANT VISIBILITY

Control dials have halo-illumination glowing white – heating up; orange – temperature reached; red – self-cleaning mode. The oven is illuminated by two powerful incandescent lights.

### COOKING FLEXIBILITY

The cooktop is designed for easy access to any burner with grates you can smoothly slide pots across. The oven is large enough to hold full size baking sheets.

## SPECIFICATIONS

### Accessories (included)

Square handle option	AH-R48
Telescopic sliding runners	•

### Burner ratings

Maximum burner power	23500 BTU
Power back centre	18500BTU
Power back left	18500BTU
Power back right	18500BTU
Power front centre	18500BTU
Power front left	23500BTU
Power front right	18500BTU
Power griddle	18000BTU

Total cooktop power	134000 BTU	Supply frequency	60Hz	Electronic oven control	•
		Supply voltage	120/240V	Internal light	•
Capacity		Product dimensions		Secondary oven functions	
Shelf positions	5	Depth	29 1/8"	Bake	•
Shelf positions	5	Height	35 3/4 - 36 3/4"	Number of secondary oven	3
Cleaning		Width	47 7/8"	Proof	•
Pyrolytic self-clean	•	Rangetop features			
Controls		Sealed Dual Flow Burners™	6	SKU	71362
Electric circuit	4 wire	Sealed range top	•		
Metal illuminated dials	•	Vent trim included	•		
Gas Requirements		Rangetop Performance			
Fitting and pipe	½ NPT, min. ⅝" flex line	Number of burners	6		
Supply Pressure (natural gas)	6" to 9" W.C	Recommended Back Guards Ventilation			
Oven features		Combustible situation	BGRV2-3048H		
Auto re-ignition system	•	Minimum CFM	1200		
Internal light	•	Non combustible situation	BGRV2-3048 / BGRV2-1248		
Oven performance		Recommended hood	HCB48-12_N (48"		
Bake power	4600	Safety			
Broil	3600W	ADA compliant	•		
Main oven - True convection	2500W	Full extension telescopic	•		
Power requirements		Secondary oven features			
Amperage	50A	3/4 Extension racks	2		
Rated current	50A	Broil	•		
		Concealed element	•		

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

---

Other product downloads available at [fisherpaykel.com](https://fisherpaykel.com)



Service & Warranty



User Guide



Guide d'installation FR



Installation Guide



Guide D'Installation



Data Sheet Dual Fuel Range



Planning Guide Dual Fuel Range



**A PEACE OF MIND SALE**

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W [www.fisherpaykel.com](https://www.fisherpaykel.com)