

## 30" Overhead Range Hood

### Ventilation

Available Products: FHWC3025MB, FHWC3025MS, FHWC3025MW

Available Colors: Black, Stainless Steel, White

Version: 08/22



## Product Specifications

### Ventilation System

Exhaust Fan Speeds	2
Maximum Air Flow Capacity	220 CFM
Maximum Sones Rating	8 sone
Charcoal Filter Included	No

### Surface Light System

Lighting Type	Incandescent
---------------	--------------

### Electrical Specifications

Voltage Rating	120 V
----------------	-------

### Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

### Controls

Control Type	Rocker Switch
--------------	---------------


### Dimensions and Volume

Height	5"
Width	30"
Depth	18 5/8"

### General Specifications

Prop 65 Label	Yes
Sound Level	67.9 dBA
Warranty - Labor	1 Year
Warranty - Parts	1 Year

## Installation Diagram

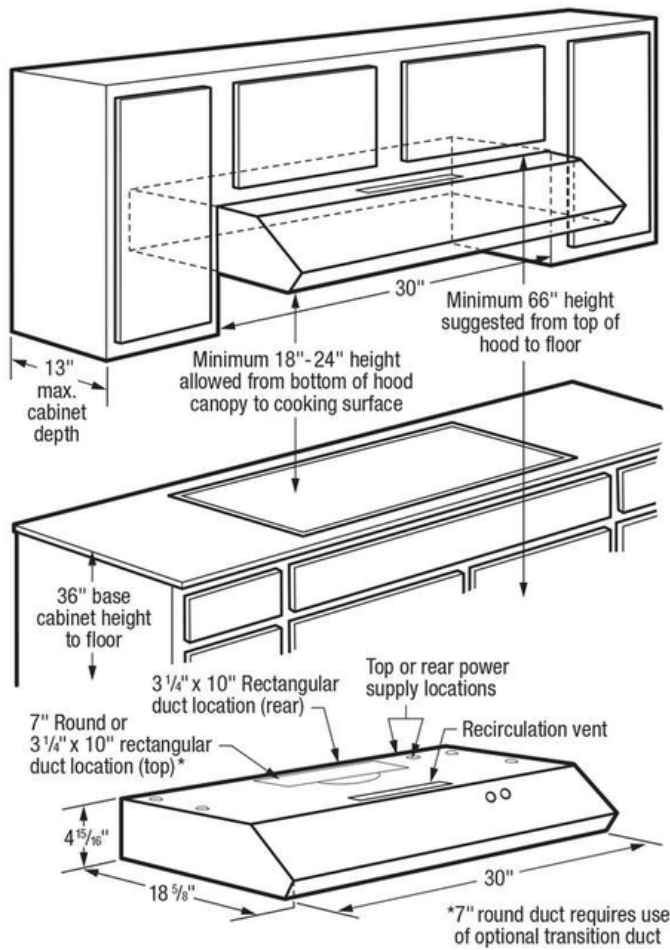


### Exhaust Options

Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required.


For detailed duct preparation and installation specifications, refer to installation instructions on web.

#### Outside Vertical – 7" Round Duct Cabinet Bottom

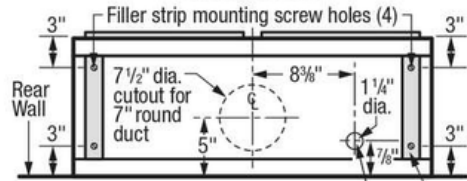

Electrical access hole (in cabinet bottom)  
Wood filler strips (recessed cabinet bottoms only)

#### Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

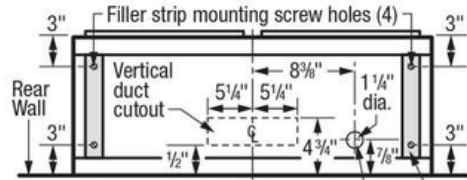

Electrical access hole (in cabinet bottom)  
Wood filler strips (recessed cabinet bottoms only)

#### Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

