

Color Variants

VI424610
Stainless steel frame
Width 15 "

Installation Accessories

VA420000
Connection strip for combination with other Vario appliances of the 400 series for flush installation

VA420001
Connection strip for combination with other Vario appliances of the 400 series for flush installation with appliance cover/filler strip

VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA420011
Connection strip for combination with other Vario appliances of the 400 series for surface-mount installation with appliance cover/filler strip

VA440010
Stainless steel cover with mounting strip

VA450400
Stainless steel adjustment strip 15"

VI424610
Vario induction cooktop 400 series
Stainless steel frame
Width 15 "

2 cooking zones with booster function
Total output 3,600 W
Solid stainless steel control knob
Precision crafting of 1/8-inch stainless steel
For surface mount installation with a visible edge or for flush installation
Can be perfectly combined with other Vario 400 series products

Cooking zones
One ø 8 1/4" induction cooking zone (2,200 W, 3,300 W with booster).
One ø 5 7/8" induction cooking zone (1,400 W, 1,800 W with booster).

Operation
Control knobs with illuminated ring, cooking zone and output level markings.
Electronic control in 12 output levels.

Features
Cooking zone marking.
Booster function for each cooking zone (only one zone at a time can be operated with booster function)
Pan detection.
Short-term timer.

Safety
Individual residual heat indication.
Safety lock.

Planning notes
Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the specific location of the control knob positions may vary.
When using the appliance cover VA 440 or adjustment strip VA 450 additional space for cut-out depth needs to be considered.
In a combination of Vario cooktops with at least one appliance cover, the adjustment strip VA 450 is required.
In a combination of several Vario 400 series cooktops a connection strip must be used. Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the respective VA 420 connecting strip must be used.
For flush installation the edge height in the cut-out needs to be at least 1/2" and for surface-mount 3/8". Ensure a continuous cut surface of 90°.
The weight capacity and stability, especially in case of thin countertops, must be supported using suitable substructures. Take the appliance weight and additional loads into account.
Flush installation is possible in countertops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the edges must be observed. For other materials, please consult with your countertop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the countertop cut-out.
If installing several Vario products in individual cut-outs allow for a minimum distance of 2" inbetween the cooktops. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Product Features
Product name / series name
Vario/Domino cooking zone cera

Construction type
CONSTR_TYPE.Built-in

Energy source
Electric

Total number of cooktop burners
2

Required cutout size (HxWxD) (mm)
90 x 360 x 490-500

Width of the product (mm)
380

Overall appliance dimensions (HxWxD) (mm)
90 x 380 x 520

Product packaging dimensions (HxWxD) (mm)
144 x 579 x 658

Net weight (kg)
8.438

Gross weight (kg)
10.0

Residual heat indicator
Separate

Location of control panel
External control

Basic surface material
Ceramic

Color of surface
Black, Stainless steel

Color of frame
Stainless steel

Approval certificates
CSA

Power cord length (cm)
96

Consumption and connection features
Watts (W)
3600

Gas connection rating (W)

Current (A)
16

Volts (V)
208-240


Frequency (Hz)
50; 60

2019-10-23
Page 1


Built-in control panel can be integrated in the bottom cabinet at drawer level.
Front panel thickness 5/8" - 1".
The drawing "Installation of the control knob" must be observed if the panel is more than 1" thick (there must be a recess at the rear for proper control module installation).
Appliance clicks into place when inserted into the countertop from above.
Appliance weight: approx. 22 lb.

Rating
Total rating 3.6 kW.
Total Amps: 16 A.
208 - 240 V / 50 Hz
Connecting cable 39 " without plug (hardwire required).

Control knob installation, flush-mounted installation

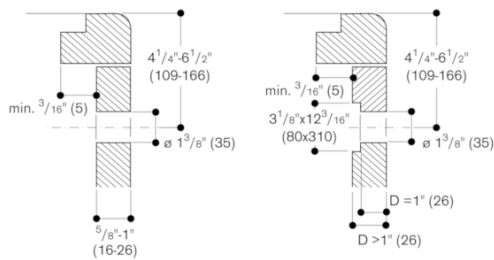


Cross-section


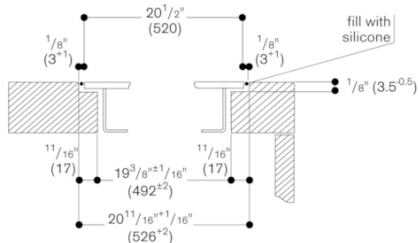


For installation with appliance cover or adjustment bar, observe the deeper notch and the slot width front and back.

Installation with appliance cover/adjustment strip; surface installation

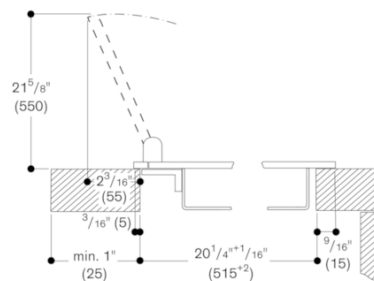

Installation with appliance cover/adjustment strip; Flush Installation

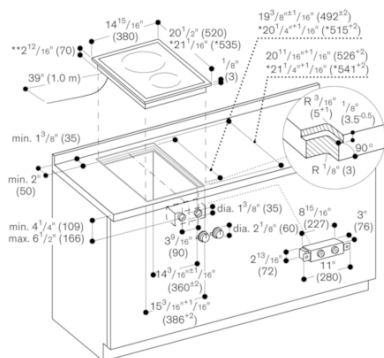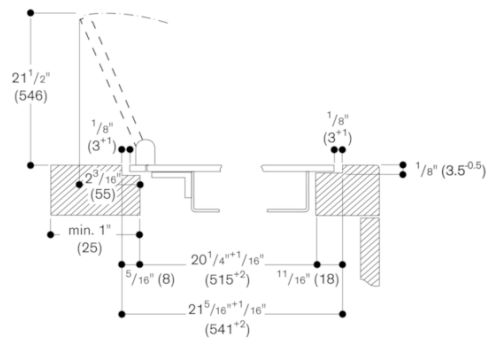

* with appliance cover or adjustment strip.
See separate planning notes.
** 3 1/16\"/>