


Jenn-Air® 36", Glass 5-Burner Gas Cooktop

JGC2536EB

Available Finishes/Colours

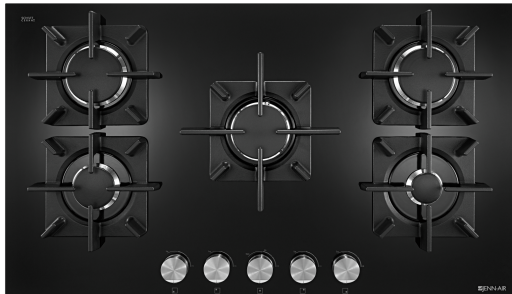

Offering a combination of sophisticated design, European style and high-performance, this cooktop features a Dual-Stacked PowerBurner that provides high power as well as a low flame for simmering, a simmer burner with replaceable melt cap for better control of the flame at the lowest levels, and also can be installed above a single wall oven. This cooktop pairs beautifully with appliances in our Euro Style and Black Floating Glass suites.

Dimensions

Depth	20 3/8
Height	4 3/16
Width	36

Configuration and Overview

Fuel Type	Gas
Cooktop Type	Traditional
Size (IN,inches)	36
Installs Over Built-In Oven	Yes
LP Convertible	Yes - Kit Included
Power Boost	No

Controls

Control Location	Front
Control Type	Knobs
Infinite Heat Controls	Yes

Controls

Knob Color	Stainless Steel
Knob Type	Metal

Misc.

Accessory Relationships	Yes
Home Delivery	Yes
Will Call	Yes

Cooktop Details

Cooktop Surface Material	Ceramic Glass
Automatic Pan Detection	No
Downdraft Vent	No
Hot Surface Indicator Light	No
Heating Element On Indicator Light	No

Top Features

18,000-BTU Dual-Stacked PowerBurner

6,000 BTU Simmer Burner

Ceramic Glass Surface


Manuals & Literature:

- [CAD Image](#)
- [Dimension Guide](#)
- [Installation Guide](#)
- [Owner Manual](#)
- [Warranty Information](#)

36" GAS COOKTOP

JGC2536EB – 36" x 4³/₁₆" x 21"


PRODUCT DIMENSIONS

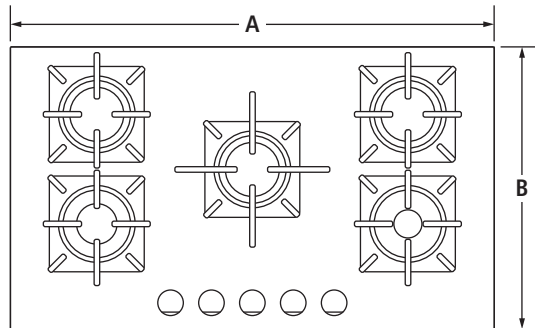


TOP VIEW

MODEL #		JGC2536EB	
		in	cm
A	Overall width	36	91.4
B	Overall depth	21	53.3
C	Center of cooktop to center of gas inlet	15 ³ / ₁₆	38.6
D*	Width of recessed cooktop	35 ⁵ / ₁₆	89.7
E	Height of recessed cooktop	3 ³ / ₁₆	8.1
F	Height from gas inlet to countertop	4 ³ / ₁₆	10.6
G	Height with grates	2 ⁵ / ₁₆	5.9
H*	Depth of recessed cooktop	20 ⁵ / ₁₆	51.6

*Measured from tab to tab. Tabs should not be bent during installation.

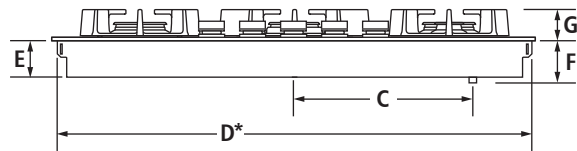

FRONT VIEW




SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


36" GAS COOKTOP

JGC2536EB – 36" x 4³/₁₆" x 21"

OPENING/CLEARANCE DIMENSIONS

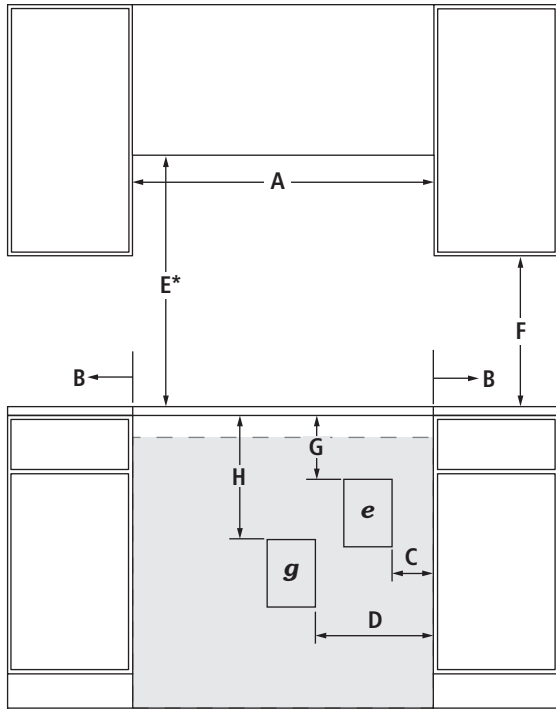

FRONT VIEW

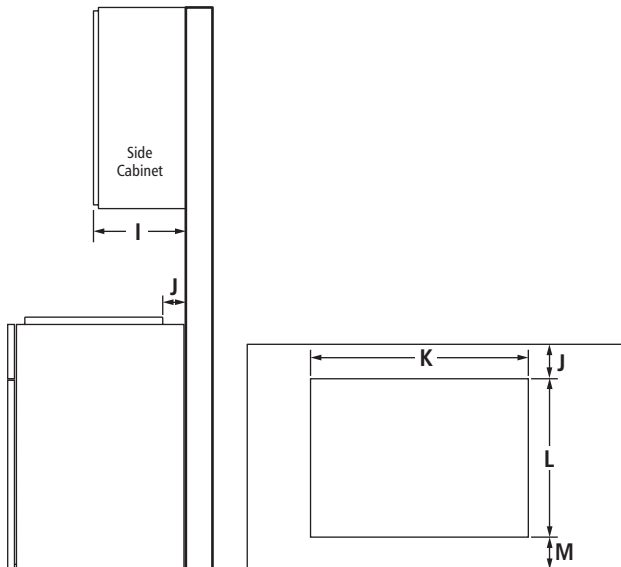

SIDE VIEW

TOP VIEW – CUTOUT

MODEL #		JGC2536EB	
		in	cm
A	Width of combustible area above cooking surface (min.)	36	91.4
B	Width from cooktop to fixed wall or other combustible material (min.)	6	15.2
C	Width to outer edge of electrical outlet (recommended)	9	22.9
D	Width to gas supply line location (recommended)	12	30.5
E*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.2
F	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
G	Height to top edge of electrical outlet (recommended)	9	22.9
H	Height to gas supply line location (recommended)	18	45.7
I	Depth of upper cabinet (recommended)	13	33.0
J	Depth from cutout to wall (min.)	2 ⁵ / ₁₆	5.9
K	Width of cutout	35 ³ / ₈	89.9
L	Depth of cutout	20 ³ / ₈	51.8
M	Depth from cutout to front of countertop (recommended)	2 ⁵ / ₁₆	5.9
e	Recommended electrical access location		
g	Recommended gas supply line location		

*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood or microwave hood combination above the cooktop, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.

GAS REQUIREMENTS

Natural Gas

This cooktop is factory-set for use with natural gas.

LP Gas Conversion

Conversion must be done by a qualified service technician. To convert to LP gas, use an LP gas conversion kit.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required. A time-delay fuse or dedicated circuit is recommended.

LOCATION REQUIREMENTS

- To ensure cooktop base clearance, cabinet side walls need to be wider than the cutout.
- If cabinet has a drawer, allow a 4" (10.2 cm) minimum clearance between countertop and top of drawer. Drawer depth may need to be shortened to avoid interfering with the gas connection or regulator.

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

