

## SISTER MMUJCO "S!

### **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC  $17\frac{3}{4}$ " (W) x  $83\frac{7}{16}$ " (H) x  $23\frac{11}{16}$ " (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

Dogo Unit	Base Unit+Stainless Panel Kits			
Base Unit (Panel Ready)	RISE™ Stainless Panel	NOIR™ Stainless	Euro-Style Stainless Panel	Pro-Style® Stainless Steel Panel
Column freezer JBZFR18IGX, JBZFL18IGX, ALOVE18FLC	LH: JKCPL181GL, RH: JKCPR181GL	LH: JKCPL181GM, RH: JKCPR181GM	LH: JKCPL181GS, RH: JKCPR181GS	LH: JKCPL181GP, RH: JKCPR181GP

#### OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

#### RISE™ STAINLESS HANDLE KIT

- W11220303
- For use with Custom Overlay panels
- Quantity One handle per kit

#### NOIR™ STAINLESS HANDLE KIT

- W11220302
- For use with Custom Overlay panels
- Quantity One handle per kit


#### **EURO-STYLE HANDLE KIT COLUMNS**

- W11220300
- For use with Custom Overlay panels
- Quantity One handle per kit

#### **PRO-STYLE® HANDLE KIT COLUMNS**

- W11220299
- For use with Custom Overlay panels
- Quantity One handle per kit

#### JOIN KITS (FOR MULTIPLE UNIT INSTALLATIONS)

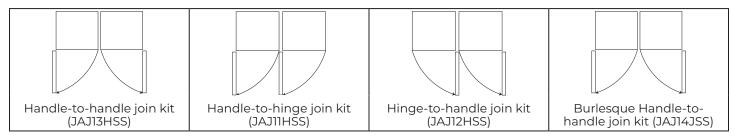




## SISTER MMUJCS "S!

## **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC  $17\frac{3}{4}$ " (W) x  $83\frac{7}{16}$ " (H) x  $23\frac{11}{16}$ " (Depth without door panels/handles)

#### **PRODUCT DIMENSIONS**

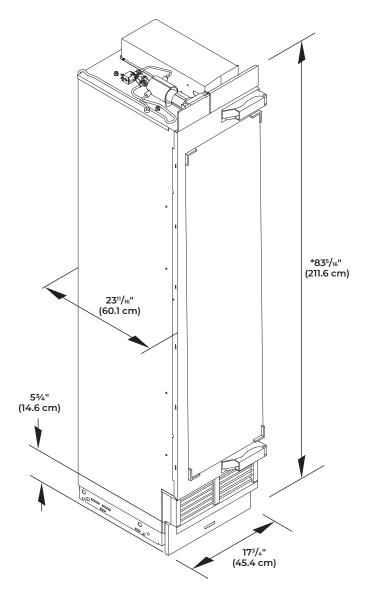

\*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.




## SISTER MMUJCO "S!


## **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC 173/4" (W) x 837/16" (H) x 2311/16" (Depth without door panels/handles)

#### **PRODUCT DIMENSIONS**

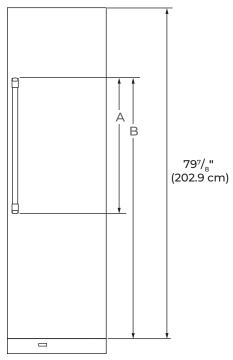

FRONT VIEW



TOP VIEW

DIMENSION	DESCRIPTION	JBZFR18IGX, JBZFL18IGX, ALOVE18FLC	
A	Height of door handle	57 <sup>15</sup> ⁄16" (147.2 cm)	
	RISE™ Stainless		
	NOIR <sup>™</sup> Stainless	405/8" (103.2 cm)	
	Euro-Style Stainless	50½16" (127.1 cm)	
	Pro-Style® Stainless	45%16" (115.7 cm)	
	Custom panel (3/4" thick)	** **	
В	Height to top of door handle	70¾" (179.7 cm)	
	RISE™ Stainless		
	NOIR™ Stainless	68 <sup>1</sup> 1⁄16" (174.5 cm)	
	Euro-Style Stainless	68 <sup>5</sup> /16" (173.4 cm)	
	Pro-Style® Stainless	66 ½16" (167.7 cm)	
	Custom panel (3/4" thick)	** **	
С	Width from side of freezer to handle – door fully open 115°	10½" (26.7 cm)	
D	Width from side of freezer to handle – door open 90°	5" (12.7 cm)	
E	Depth with handle	26½" (67.7 cm)	
	RISE™ Stainless		
	NOIR™ Stainless	26%16" (67.5 cm)	
	Euro-Style Stainless	26 %16" (67.4 cm)	
	Pro-Style® Stainless	27 ½" (68.9 cm)	
	Custom panel (3/4" thick)	** **	
F	Depth with door	24½" (62.2 cm)	


<sup>\*\*</sup>For custom panel models, this depends on handle chosen.

# SI COLUMN FREEZER

## **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC  $17\frac{3}{4}$ " (W) x  $83\frac{7}{16}$ " (H) x  $23\frac{11}{16}$ " (Depth without door panels/handles)

#### **OPENING DIMENSIONS**

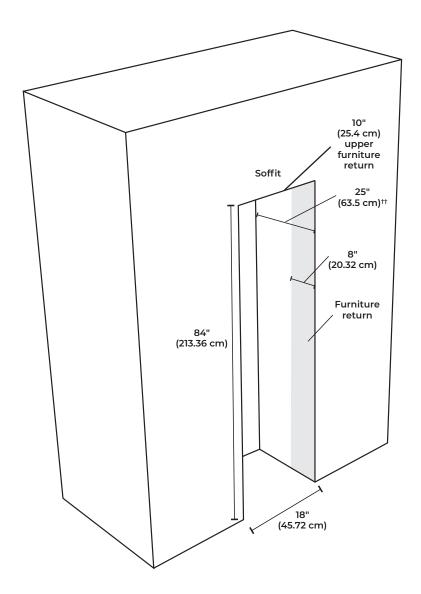

#24" with 24" trim kit.




## 78" CDLUMM FREEZLR

### **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC  $17\frac{3}{4}$ " (W) x  $83\frac{7}{16}$ " (H) x  $23\frac{11}{16}$ " (Depth without door panels/handles)

NO FLOOR ACCESS

**TOP VIEW - CABINET OPENING** 

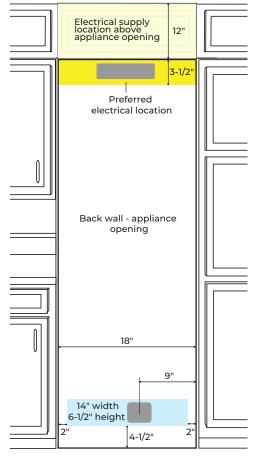

water supply location behind unit (also approved for electrical supply)

FRONT VIEW - CABINET OPENING

#### **ELECTRICAL SUPPLY LOCATION**

- Lighter yellow area indicates electrical supply located in a cabinet or accessible space above the unit opening.
- Power cord length is 9ft and originates from the front right corner of the unit.
- There is room for a surface mount electrical outlets within the top 3½" of the opening.
- Darker yellow area indicates the electrical supply location within the top of the opening.
- Outlet should be located near the center of the allowable area for easy connection and disconnection after installation.

#### WALL WATER SUPPLY LOCATIONS

- Water outlet area shown in blue.
- Water outlet area is also approved for the electrical outlet location.
- Outlet area width and height corresponds to a 3/4" deep recessed area found on the back of all unit.
- Targeting the left side of the allowable area allows for additional water line routing flexibility and easier water line management under the unit.

#### FLOOR WATER SUPPLY LOCATIONS

■ There is no floor access through an 18" unit.



## SHEEZER KMUJCO "SI

### **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC  $17\frac{3}{4}$ " (W) x  $83\frac{7}{16}$ " (H) x  $23\frac{11}{16}$ " (Depth without door panels/handles)

#### **ELECTRICAL REQUIREMENTS**

## **AWARNING**



#### **Electrical Shock Hazard**

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

115 V, 60 Hz, AC only, 15 A or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

#### WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 and 120 psi (207 kPa and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

#### **REVERSE OSMOSIS WATER SUPPLY**

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

JennAir® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

#### LOCATION REQUIREMENTS

### AWARNING



#### **Explosion Hazard**

Keep flammable materials and vapors, such as gasoline, away from freezer.

Failure to do so can result in death, explosion, or fire.

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.




## SISTEM NMUJCO "S!

## **DETAILED PLANNING DIMENSIONS GUIDE**

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC

 $17\frac{3}{4}$ " (W) x  $83\frac{7}{16}$ " (H) x  $23\frac{11}{16}$ " (Depth without door panels/handles)

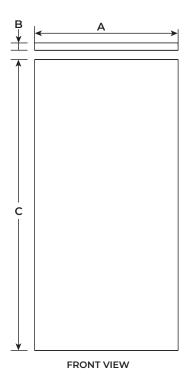

Thickness (B)	3/4" (1.9 cm) max.	
Weight	60 lbs. (27.2 kg) max.	
Height (C)	79%" (202.9 cm)	

#### **WOOD PANEL GUIDE**

#### **A**CAUTION

#### Pinch Hazard

Installation of door panels with less than a %" (0.95 cm) gap between the door panel and the adjacent cabinet increases the risk of potential pinching.

