

UNDER COUNTER WINE CELLARS

JUW24FRERS, JUW24FLERS – 23%" x 34%" x 26" (including handle) JUW24FRECX, JUW24FLECX – 23%" x 34%" x 23%" JUWFR242GM, JUWFL242GM – 23%" x 34%" x 26½" (including handle)

PRODUCT DIMENSIONS



FRONT VIEW



MODEL #		JUW24 JUW24	4FRERS 4FLERS 4FRECX 4FLECX	JUWFR242GM JUWFL242GM		
		in	cm	in	cm	
Α	Width of door	23¾	60.3	23¾	60.3	
В	Width of grille	23¾	60.3	23¾	60.3	
С	Height to top of handle Pro-Style® Stainless*	281/4	71.7	_	_	
	Euro-Style Stainless	28	71.1	_		
	Noir	_	_	281/4	71.7	
	Custom panel	**	**	_		
D	Height of door	301//8	76.6	301//8	76.6	
Ε [†]	Height with hinge cover (min.)	34¾	87.4	34¾	87.4	
F	Height of grille	3¾	9.4	3¾	9.4	
G	Width with hinge cover	231//8	60.6	231//8	60.6	
	Width from side of wine cellar to handle – door open 90° Pro-Style® Stainless*	25/8	6.7	_	_	
Н	Euro-Style Stainless	21/8	5.3	_		
	Noir	_	_	23/16	5.5	
	Custom panel	**	**		_	
ı	Depth without door	21%	55.0	21%	55.0	
J‡	Depth with door	231//8	60.7	231//8	60.7	
K	Depth with handle Pro-Style® Stainless*	26½	67.3	_	_	
	Euro-Style Stainless	26	66.0	_		
	Noir			26½	67.3	
	Custom panel	**	**			
L	Depth with door open 90°	473/4	121.4	47¾	121.4	

^{*}Requires optional Pro-Style® Stainless handle kit – W10588599. Each kit includes one Pro-Style® badge and one handle.

^{**}For custom panel models, this depends on handle chosen.


[†]Add ⁵/₈" (1.6 cm) to the height dimension when leveling legs are fully extended.

 $^{^{\}ddagger}$ Includes recommended $^{3}\!\!/_{\!\!\!4}$ (1.9 cm) custom panel thickness (JUW24FRECX, JUW24FLECX).

UNDER COUNTER WINE CELLARS

JUW24FRERS, JUW24FLERS – 23⁷/₈" x 34³/₈" x 26" (including handle) JUW24FRECX, JUW24FLECX – 23⁷/₈" x 34³/₈" x 23⁷/₈" JUWFR242GM, JUWFL242GM – 23⁷/₈" x 34³/₈" x 26¹/₂" (including handle)

DIMENSIONS AS INSTALLED



MODEL #		JUW24FRERS JUW24FLERS JUW24FRECX JUW24FLECX		JUWFR242GM JUWFL242GM	
		in	cm	in	cm
A *	Height with hinge cover (min.)	34¾	87.4	34¾	87.4
В*	Height to top of door (min.)	341//8	86.8	341//8	86.8
C *	Height to top of handle (min.) Pro-Style® Stainless**	281/4	71.7	_	_
	Euro-Style Stainless	28	71.1	_	_
	Noir	_	_		
	Custom panel	t	†	_	_
D*	Height to top of grille (min.)	4	10.2	4	10.2
E*	Height of recessed wine cellar (min.)	341//8	86.8	341//8	86.8
F	Depth with door open 90° (min.)	473/4	121.4	473/4	121.4
G	Depth with handle (min.) Pro-Style® Stainless**	26½	67.3	_	_
	Euro-Style Stainless	26	66.0	_	_
	Noir	_	_	26½	67.3
	Custom panel	t	t	_	_
H [‡]	Depth with door (min.)	24	60.9	24	60.9
ı	Depth without door (min.)	21%	55.0	21%	55.0
J	Depth of grille (min.)	20¾	52.7	20¾	52.7

^{*}Add %" (1.6 cm) to the height dimension when leveling legs are fully extended.

^{**}Requires optional Pro-Style® Stainless handle kit – W10588599. Each kit includes one Pro-Style® badge and one handle.


[†]For custom panel models, this depends on handle chosen.

 $^{^{\}ddagger}$ Includes recommended 3 /4" (1.9 cm) custom panel thickness (JUW24FRECX, JUW24FLECX).


UNDER COUNTER WINE CELLARS


JUW24FRERS, JUW24FLERS – 23⁷/₈" x 34³/₈" x 26" (including handle) JUW24FRECX, JUW24FLECX – 23⁷/₈" x 34³/₈" x 23⁷/₈" JUWFR242GM, JUWFL242GM – 23⁷/₈" x 34³/₈" x 26¹/₈" (including handle)

OPENING/CLEARANCE DIMENSIONS



FRONT VIEW



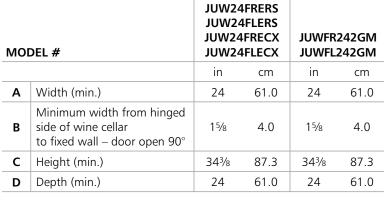


VENTILATION REQUIREMENTS

For proper ventilation, allow 1/4" (0.6 cm) space on the top and each side.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Minimum length of the power cord is 63" (160.0 cm). Do not use an extension cord.



BACK VIEW