42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR
(BASE UNIT REQUIRES SUITE-COORDINATING **FULL HEIGHT** PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

BASE UNIT + FULL HEIGHT PANEL KIT = FINISHED REFRIGERATOR

Easily transform these overlay refrigerators into one of our signature kitchen suite designs with one of our suite-coordinating stainless steel panel kits. To do so, you must order one of the overlay base units (left column) and one of the suite-coordinating panel kits. The kits include refrigerator and freezer door panels, air grille and pre-installed handles.

	Coordinating Stainless Full Height Panel Kits			
Base Unit Model Number	Pro-Style® Stainless	î	Euro-Style Stainless	11
French Door JF42NXFXDE	JBFFS42NHP		JBFFS42NHS	

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS



ARMOIRE-STYLE DOOR PANEL KIT

W10663564 - 42" - Obsidian Interior

- For use with fully integrated and flush refrigerators
- Enables installation and proper venting of full height custom door panels (not included) that hide the top panel
- Includes grille trim and air divider



PRO-STYLE® STAINLESS HANDLE KIT

W10250642 - 42" French Door

• For use with Custom Overlay fully integrated built-in refrigerators

EURO-STYLE STAINLESS HANDLE KIT

W10250639 - 42" French Door

• For use with Custom Overlay fully integrated built-in refrigerators




1E 42 NIVEVO E

42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR


(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE - 41¾" x 82¾" x 24" (without door/handles)

PRODUCT DIMENSIONS

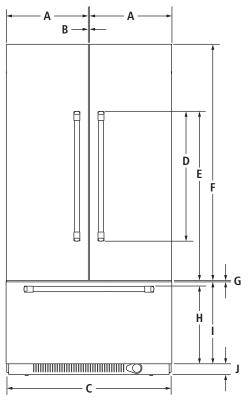

FRONT VIEW



MOI	MODEL #		JF42NXFXDE	
		in	cm	
Α	Width of each door	2013/16	52.9	
В	Space between doors	1/8	0.3	
C	Overall width	413/4	106.0	
D	Height of door handles Pro-Style® Stainless	323/8	82.2	
	Euro-Style Stainless	37%	96.0	
Ε	Height to top of door handles Pro-Style® Stainless	423/8	107.6	
	Euro-Style Stainless	447/8	114.0	
F	Height of doors	591/8	150.2	
G	Space between doors and drawer	1/8	0.3	
	Height to top of drawer handle			
Н	Pro-Style® Stainless	193/8	49.2	
	Euro-Style Stainless	191/4	48.7	
- 1	Height of drawer	201/2	52.1	
J	Height of bottom grille	3	7.6	
K	Width of recessed refrigerator	41	104.1	
L	Width from side of refrigerator to handle – door fully open 110° Pro-Style® Stainless	71/8	20.0	
	Euro-Style Stainless	71/4	18.5	
М	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless	2	5.1	
	Euro-Style Stainless	11/2	3.9	
N	Depth without door panel kit	24	61.0	
0	Depth with doors Pro-Style® Stainless panel kit	243/4	62.9	
	Euro-Style Stainless panel kit	243/4	62.9	
	Custom panel (3/4"/1.9 cm)	243/4	62.9	
P	Depth with handles Pro-Style® Stainless	273/8	69.5	
•	Euro-Style Stainless	267/8	68.3	
Q	Depth with doors open 90°	44	111.8	
	·			




42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

DIMENSIONS AS INSTALLED

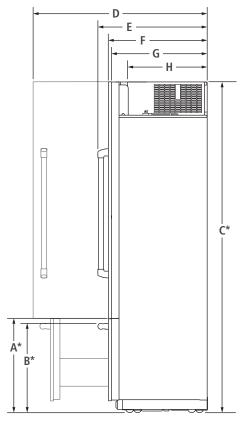

MODEL #		JF42NXFXDE	
		in	cm
A *	Height to top of drawer (min.)	23½	59.7
	Height to top of drawer handle (min.)		
В*	Pro-Style® Stainless	223/8	56.8
	Euro-Style Stainless	221/4	56.3
C*	Height to top of doors (min.)	821/8	210.5
D	Depth with door open 90° (min.)	43¾	111.1
	Depth with handles (min.)		
Ε	Pro-Style® Stainless	273/8	69.5
	Euro-Style Stainless	261//8	68.3
	Depth with doors (min.)		
-	Pro-Style® Stainless panel kit	243/4	62.9
F	Euro-Style Stainless panel kit	243/4	62.9
	Custom panel (¾"/1.9 cm)	24¾	62.9
G	Depth without door panel kit (min.)	24	61.0
Н	Depth of compressor (min.)	197/8	50.5
	41/11/2 2	C 11	

^{*}Add 11/4" (3.2 cm) to the height dimension when leveling legs are fully extended.


42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)


JF42NXFXDE - 41¾" x 82¾" x 24" (without door/handles)

DOOR PANEL INSTALLATION


ARMOIRE-STYLE INSTALLATION*



FRONT VIEW – OPEN TO CEILING (OPTION 1)



FRONT VIEW – FALSE FRONT (OPTION 2)



SIDE VIEW - CUSTOM PANEL


- Attach the grille bracket assembly and grille panel provided in the armoire-style panel kit
 - * Refer to the Armoire Kit installation instructions for additional dimensions and installation details.


42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE – 41¾" x 82¾" x 24" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

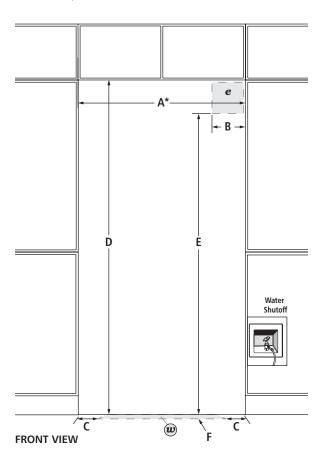



MODEL #		JF42NXFXDE	
		in	cm
A *	Width (min.)	42	106.7
В	Width of recommended electrical location	71/2	19.1
С	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection location		

^{*}A minimum 2" (5.1 cm) furniture return must extend behind the face of the cabinet on all sides.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

BACK VIEW



42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR
(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JF42NXFXDE - 41¾" x 83½" x 24" (without door/handles)

BASE UNIT + PANEL KIT = FINISHED REFRIGERATOR

Easily transform these overlay refrigerators into one of our signature kitchen suite designs with one of our suite-coordinating stainless steel panel kits. To do so, you must order one of the overlay base units (left column) and one of the suite-coordinating panel kits. The kits include refrigerator and freezer door panels, air grille and pre-installed handles.

	Coordinating Stainless Panel Kits			
Base Unit Model Number	Pro-Style® Stainless	(2222)	Euro-Style Stainless	11
French Door JF42NXFXDE JF36NXFXDE	JPK42FNXEPS		JPK42FNXESS	

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS



ARMOIRE-STYLE DOOR PANEL KIT

W10663564 - 42" - Obsidian Interior

- For use with fully integrated and flush refrigerators
- Enables installation and proper venting of full height custom door panels (not included) that hide the top panel
- · Includes grille trim and air divider



PRO-STYLE® STAINLESS HANDLE KIT

W10250642 - 42" French Door

• For use with Custom Overlay fully integrated built-in refrigerators

EURO-STYLE STAINLESS HANDLE KIT


W10250639 - 42" French Door

• For use with Custom Overlay fully integrated built-in refrigerators




42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF42NXFXDE – 41¾" x 83½" x 24" (without door/handles)

PRODUCT DIMENSIONS

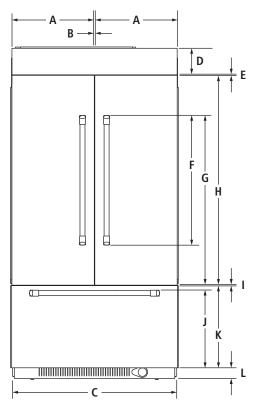

FRONT VIEW




МОІ	DEL#	JF42NXFXDE		
		in	cm	
Α	Width of each door	205/8	52.4	
В	Space between doors	1/8	0.3	
С	Overall width	413/4	106.0	
D	Height of top grille and bracket	61/2	16.5	
Е	Space between doors and top grille	3/8	0.8	
F	Height of door handles Pro-Style® Stainless	323/8	82.2	
	Euro-Style Stainless	371/8	96.0	
G	Height to top of door handles Pro-Style® Stainless	423/8	107.6	
	Euro-Style Stainless	447/8	114.0	
Н	Height of doors	52¾	133.0	
1	Space between doors and drawer	1/8	0.3	
	Height to top of drawer handle			
J	Pro-Style® Stainless	193//8	49.2	
	Euro-Style Stainless	191/4	48.7	
K	Height of drawer	201/2	52.1	
L	Height of bottom grille	3	7.6	
М	Width of recessed refrigerator	41	104.1	
N	Width from side of refrigerator to handle – door fully open 110° Pro-Style® Stainless	7 ⁷ /8	20.0	
	Euro-Style Stainless	71/4	18.5	
0	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless	2	5.1	
	Euro-Style Stainless	1 1/2	3.9	
Р	Depth without door panel kit	24	61.0	
Q	Depth with doors Pro-Style® Stainless panel kit	243/4	62.9	
	Euro-Style Stainless panel kit	243/4	62.9	
	Custom panel (¾"/1.9 cm)	243/4	62.9	
R	Depth with handles Pro-Style® Stainless	273/8	69.5	
-	Euro-Style Stainless	267/8	68.3	
S	Depth with doors open 90°	44	111.8	



42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF42NXFXDE – 41¾" x 83½" x 24" (without door/handles)

DIMENSIONS AS INSTALLED

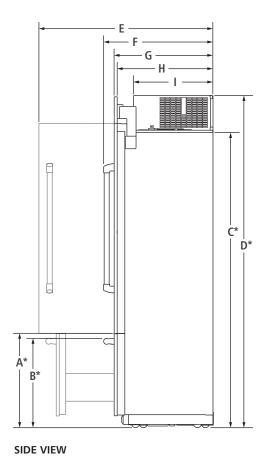

MOD	MODEL #		JF42NXFXDE	
		in	cm	
A *	Height to top of drawer (min.)	231/2	59.7	
	Height to top of drawer handle (min.)			
В*	Pro-Style® Stainless	223/8	56.8	
	Euro-Style Stainless	221/4	56.3	
C *	Height to top of doors (min.)	743/8	188.9	
D*	Height to top of grille and bracket (min.)	831/8	211.1	
Е	Depth with door open 90° (min.)	43¾	111.1	
	Depth with handles (min.)			
F	Pro-Style® Stainless	273/8	69.5	
	Euro-Style Stainless	261/8	68.3	
	Depth with doors (min.)			
G	Pro-Style® Stainless panel kit	24¾	62.9	
G	Euro-Style Stainless panel kit	24¾	62.9	
	Custom panel (¾"/1.9 cm)	24¾	62.9	
Н	Depth without door panel kit (min.)	24	61.0	
I	Depth of compressor (min.)	197/8	50.5	

^{*}Add $1\frac{1}{4}$ " (3.2 cm) to the height dimension when leveling legs are fully extended.





42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)


JF42NXFXDE - 41³/₄" x 83¹/₈" x 24" (without door/handles)

3 STYLES FOR DOOR PANEL INSTALLATION

STANDARD INTEGRATED GRILLE INSTALLATION







 Attach the standard custom grille with the standard grille bracket provided with the refrigerator


 The standard grille panel height allows for an air gap critical to refrigerator performance

 Attach the full height grille with the integrated grille bracket provided


with the refrigerator

SIDE VIEW – STAINLESS STEEL PANEL KIT


FULLY INTEGRATED GRILLE INSTALLATION








FRONT VIEW – FALSE FRONT (OPTION 2)




SIDE VIEW – CUSTOM PANEL


ARMOIRE-STYLE INSTALLATION*



FRONT VIEW – OPEN TO CEILING (OPTION 1)



FRONT VIEW – FALSE FRONT (OPTION 2)



SIDE VIEW – CUSTOM PANEL

- Attach the grille bracket assembly and grille panel provided in the
 - * Refer to the Armoire Kit installation instructions for additional dimensions and installation details.


armoire-style panel kit


IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air* appliances are appropriately UL, CUL or CSA approved.



42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF42NXFXDE – 41¾" x 83½" x 24" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

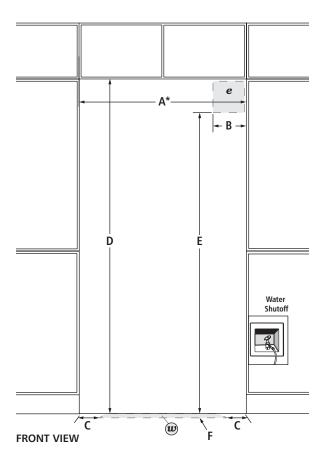



MODEL #		JF42NXFXDE	
		in	cm
A *	Width (min.)	42	106.7
В	Width of recommended electrical location	71/2	19.1
С	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
Е	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection location		

^{*}Minimum width must extend behind the face of the cabinet for at least 2" (5.1 cm).

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

BACK VIEW

