# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING **FULL HEIGHT** PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35<sup>3</sup>/<sub>4</sub>" x 82<sup>7</sup>/<sub>8</sub>" x 24" (without door/handles)

# BASE UNIT + FULL HEIGHT PANEL KIT = FINISHED REFRIGERATOR

Easily transform these overlay refrigerators into one of our signature kitchen suite designs with one of our suite-coordinating stainless steel panel kits. To do so, you must order one of the overlay base units (left column) and one of the suite-coordinating panel kits. The kits include refrigerator and freezer door panels, air grille and pre-installed handles.

	Coordinating Stainless Full Height Panel Kits			
Base Unit Model Number	Pro-Style <sup>®</sup> Stainless	11	Euro-Style Stainless	11
French Door <b>JF36NXFXDE</b>	JBBFS36NHP		JBBFS36NHS	

# OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS



ARMOIRE-STYLE DOOR PANEL KIT

W10663562 - 36" - Obsidian Interior

- For use with fully integrated and flush refrigerators
- Enables installation and proper venting of full height custom door panels (not included) that hide the top panel
- Includes grille trim and air divider



PRO-STYLE® STAINLESS HANDLE KIT

### W10745429 – 36" French Door

• For use with Custom Overlay fully integrated built-in refrigerators

## EURO-STYLE STAINLESS HANDLE KIT


#### W10745430 - 36" French Door

• For use with Custom Overlay fully integrated built-in refrigerators




# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35<sup>3</sup>/4" x 82<sup>7</sup>/8" x 24" (without door/handles)

## PRODUCT DIMENSIONS

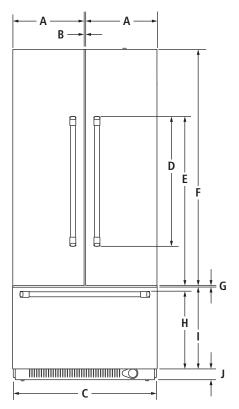

FRONT VIEW

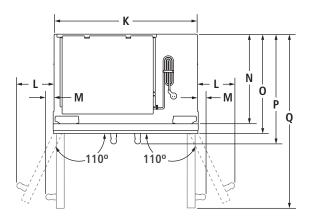




моі	DEL #	JF36N	XFXDE
		in	cm
Α	Width of each door	<b>17</b> <sup>13</sup> / <sub>16</sub>	45.2
В	Space between doors	1/8	0.3
С	Overall width	35¾	90.8
D	Height of door handles Pro-Style® Stainless	32¾	82.2
	Euro-Style Stainless	371/8	96.0
E	Height to top of door handles Pro-Style® Stainless	423/8	107.6
	Euro-Style Stainless	441/8	114.0
F	Height of doors	591/8	150.2
G	Space between doors and drawer	1/8	0.3
н	Height to top of drawer handle Pro-Style® Stainless	193⁄8	49.2
	Euro-Style Stainless	191/4	48.7
I	Height of drawer	201/2	52.1
J	Height of bottom grille	3	7.6
К	Width of recessed refrigerator	35	88.9
L	Width from side of refrigerator to handle – door fully open 110° Pro-Style® Stainless	7	17.8
	Euro-Style Stainless	61/2	16.5
М	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless	2	5.1
	Euro-Style Stainless	11/2	3.9
N	Depth without door panel kit	24	61.0
	Depth with doors Pro-Style® Stainless panel kit	24 <sup>3</sup> / <sub>4</sub>	62.9
0	Euro-Style Stainless panel kit	243/4	62.9
	Custom panel (¾"/1.9 cm)	243/4	62.9
Р	Depth with handles Pro-Style® Stainless	273/8	69.5
	Euro-Style Stainless	267/8	68.3
Q	Depth with doors open 90°	41	104.1



# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35¾" x 827%" x 24" (without door/handles)

## DIMENSIONS AS INSTALLED

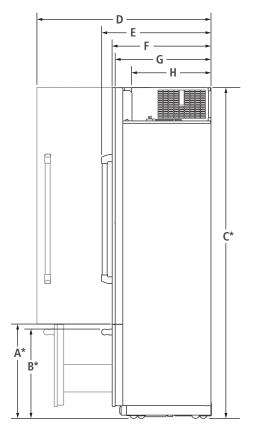

MOI	DEL # JF36N>		XFXDE
		in	cm
<b>A</b> *	Height to top of drawer (min.)	231/2	59.7
	Height to top of drawer handle (min.)		
<b>B</b> *	Pro-Style <sup>®</sup> Stainless	223/8	56.8
	Euro-Style Stainless	221/4	56.3
С*	Height to top of doors (min.)	821/8	210.5
D	Depth with door open $90^{\circ}$ (min.)	41	104.1
	Depth with handles (min.)		
Е	Pro-Style <sup>®</sup> Stainless	27¾	69.5
	Euro-Style Stainless	261/8	68.3
	Depth with doors (min.)		
F	Pro-Style <sup>®</sup> Stainless panel kit	24¾	62.9
	Euro-Style Stainless panel kit	24¾	62.9
	Custom panel (¾"/1.9 cm)	24¾	62.9
G	Depth without door panel kit (min.)	24	61.0
Н	Depth of compressor (min.)	191/8	50.5

\*Add  $1\frac{1}{4}$ " (3.2 cm) to the height dimension when leveling legs are fully extended.


SIDE VIEW




# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35<sup>3</sup>/<sub>4</sub>" x 82<sup>7</sup>/<sub>8</sub>" x 24" (without door/handles)

### DOOR PANEL INSTALLATION

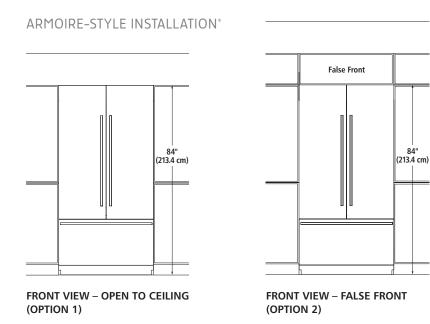

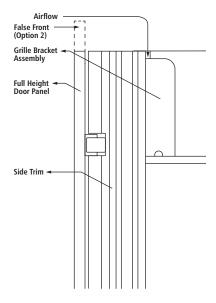

SIDE VIEW - CUSTOM PANEL


- Attach the grille bracket assembly and grille panel provided in the armoire-style panel kit
  - \* Refer to the Armoire Kit installation instructions for additional dimensions and installation details.



# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35<sup>3</sup>/<sub>4</sub>" x 82<sup>7</sup>/<sub>8</sub>" x 24" (without door/handles)

## OPENING/CLEARANCE DIMENSIONS

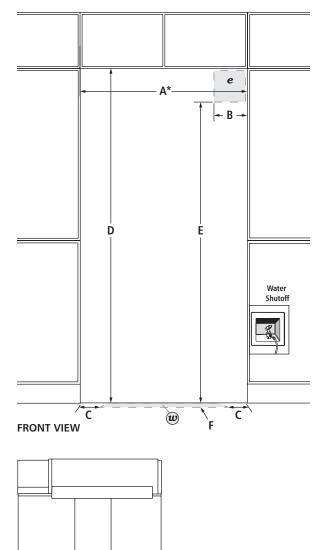

MODEL #		JF36NXFXDE	
		in	cm
<b>A</b> *	Width (min.)	36	91.4
В	Width of recommended electrical location	4	10.2
С	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
е	Recommended electrical connection location		
w	Recommended water connection locatio	n	
*A minimum 2" (5.1 cm) furniture return must extend behind the face			

\*A minimum 2" (5.1 cm) furniture return must extend behind the face of the cabinet on all sides.

#### ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

#### WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

#### **Reverse Osmosis Water Supply**

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

#### LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.



۵



# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35¾" x 831%" x 24" (without door/handles)

# BASE UNIT + PANEL KIT = FINISHED REFRIGERATOR

Easily transform these overlay refrigerators into one of our signature kitchen suite designs with one of our suite-coordinating stainless steel panel kits. To do so, you must order one of the overlay base units (left column) and one of the suite-coordinating panel kits. The kits include refrigerator and freezer door panels, air grille and pre-installed handles.



# OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS



ARMOIRE-STYLE DOOR PANEL KIT

W10663562 - 36" - Obsidian Interior

- For use with fully integrated and flush refrigerators
- Enables installation and proper venting of full height custom door panels (not included) that hide the top panel
- Includes grille trim and air divider



PRO-STYLE® STAINLESS HANDLE KIT

### W10745429 – 36" French Door

• For use with Custom Overlay fully integrated built-in refrigerators

## EURO-STYLE STAINLESS HANDLE KIT


#### W10745430 - 36" French Door

• For use with Custom Overlay fully integrated built-in refrigerators




# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35<sup>3</sup>/<sub>4</sub>" x 83<sup>1</sup>/<sub>8</sub>" x 24" (without door/handles)

## PRODUCT DIMENSIONS

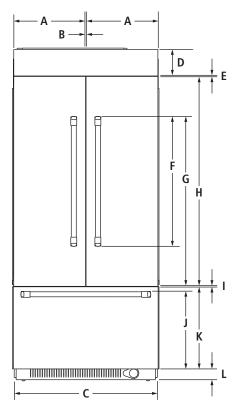

#### FRONT VIEW

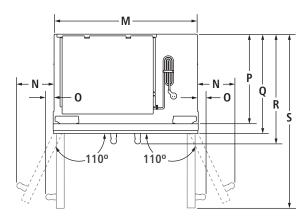


**TOP VIEW** 

мо	DEL #	JF36N	XFXDE
		in	cm
Α	Width of each door	175⁄8	44.8
В	Space between doors	1/8	0.3
С	Overall width	35¾	90.8
D	Height of top grille and bracket	61/2	16.5
Е	Space between doors and top grille	3/8	0.8
F	Height of door handles Pro-Style® Stainless	32¾	82.2
	Euro-Style Stainless	371/8	96.0
G	Height to top of door handles Pro-Style® Stainless	423⁄8	107.6
	Euro-Style Stainless	447/8	114.0
Н	Height of doors	52¾	133.0
Т	Space between doors and drawer	1/8	0.3
	Height to top of drawer handle		
J	Pro-Style <sup>®</sup> Stainless	19¾	49.2
	Euro-Style Stainless	19 <sup>1</sup> /4	48.7
Κ	Height of drawer	201/2	52.1
L	Height of bottom grille	3	7.6
М	Width of recessed refrigerator	35	88.9
N	Width from side of refrigerator to handle – door fully open 110° Pro-Style <sup>®</sup> Stainless	7	17.8
	Euro-Style Stainless	61/2	16.5
0	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless	2	5.1
	Euro-Style Stainless	1 1/2	3.9
Ρ	Depth without door panel kit	24	61.0
	Depth with doors Pro-Style® Stainless panel kit	24¾	62.9
Q	Euro-Style Stainless panel kit	24¾	62.9
	Custom panel (¾"/1.9 cm)	24¾	62.9
R	Depth with handles Pro-Style <sup>®</sup> Stainless	273/8	69.5
	Euro-Style Stainless	261/8	68.3
S	Depth with doors open 90°	41	104.1



# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35<sup>3</sup>/<sub>4</sub>" x 83<sup>1</sup>/<sub>8</sub>" x 24" (without door/handles)

## DIMENSIONS AS INSTALLED

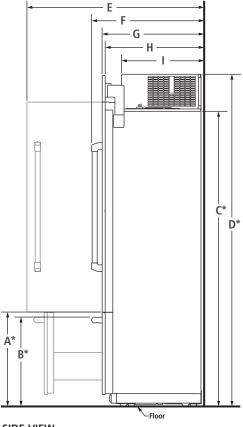

мо	DEL #	JF36N	XFXDE
		in	cm
<b>A</b> *	Height to top of drawer (min.)	231/2	59.7
	Height to top of drawer handle (min.)		
<b>B</b> *	Pro-Style <sup>®</sup> Stainless	223/8	56.8
	Euro-Style Stainless	221/4	56.3
С*	Height to top of doors (min.)	74¾	188.9
<b>D</b> *	Height to top of grille and bracket (min.)	831/8	211.1
Е	Depth with door open 90 $^{\circ}$ (min.)	41	104.1
	Depth with handles (min.)		
F	Pro-Style <sup>®</sup> Stainless	27¾	69.5
	Euro-Style Stainless	261/8	68.3
	Depth with doors (min.)		
G	Pro-Style <sup>®</sup> Stainless panel kit	243/4	62.9
	Euro-Style Stainless panel kit	24¾	62.9
	Custom panel (¾"/1.9 cm)	243/4	62.9
Н	Depth without door panel kit (min.)	24	61.0
I	Depth of compressor (min.)	191/8	50.5
*Add $1^{1}/4^{"}$ (3.2 cm) to the height dimension when leveling legs are fully extended.			


SIDE VIEW




# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35¾" x 83½" x 24" (without door/handles)

## **3 STYLES FOR DOOR PANEL INSTALLATION**


## STANDARD INTEGRATED GRILLE INSTALLATION





SIDE VIEW – STAINLESS STEEL PANEL KIT

## FULLY INTEGRATED GRILLE INSTALLATION




False Front


**FRONT VIEW – FALSE FRONT** 

(OPTION 2)

FRONT VIEW – OPEN TO CEILING (OPTION 1)

### ARMOIRE-STYLE INSTALLATION\*






#### FRONT VIEW – OPEN TO CEILING (OPTION 1)

FRONT VIEW – FALS (OPTION 2)


**IMPORTANT:** Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




SIDE VIEW – CUSTOM PANEL

- Attach the standard custom grille with the standard grille bracket provided with the refrigerator
- The standard grille panel height allows for an air gap critical to refrigerator performance

• Attach the full height grille with the integrated grille bracket provided with the refrigerator



#### SIDE VIEW – CUSTOM PANEL




#### SIDE VIEW - CUSTOM PANEL

- Attach the grille bracket assembly and grille panel provided in the armoire-style panel kit
  - Refer to the Armoire Kit installation instructions for additional dimensions and installation details.



# 36" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR (BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES) JF36NXFXDE – 35¾" x 83½" x 24" (without door/handles)

### OPENING/CLEARANCE DIMENSIONS

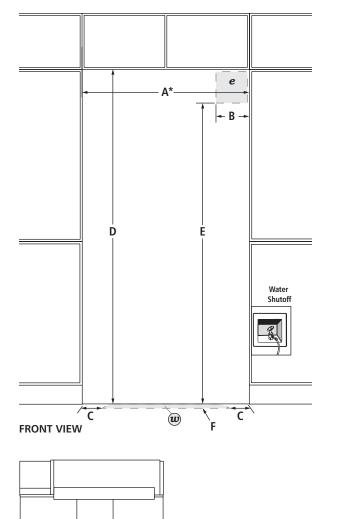

MODEL #		JF36NXFXDE	
		in	cm
<b>A</b> *	Width (min.)	36	91.4
В	Width of recommended electrical location	4	10.2
С	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
Е	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
е	Recommended electrical connection location		
w	Recommended water connection location		
*Minimum width must extend behind the face of the cabinet for at			

\*Minimum width must extend behind the face of the cabinet for at least 2" (5.1 cm).

#### ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

#### WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

#### **Reverse Osmosis Water Supply**

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

#### LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.



۵

