


36"/30" PYRAMID-STYLE WALL-MOUNT CANOPY HOODS


JXW8536DS – 36" x 24⁵/₈"-42⁵/₈" x 19¹/₁₆"

JXW8530DS – 30" x 24⁵/₈"-42⁵/₈" x 19¹/₁₆"


PRODUCT DIMENSIONS

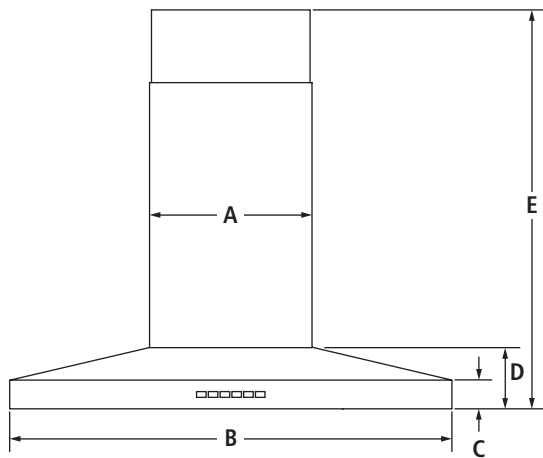

FRONT VIEW

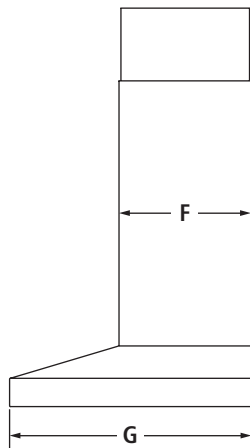

SIDE VIEW

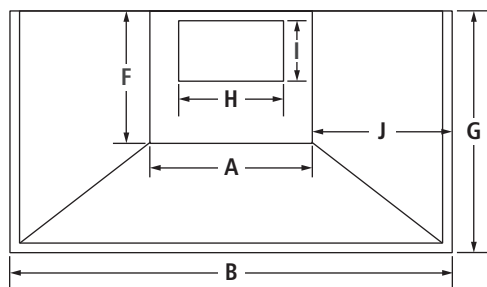

TOP VIEW

MODEL #		JXW8536DS		JXW8530DS	
		in	cm	in	cm
A	Width of chimney	13 ³ / ₁₆	33.5	13 ³ / ₁₆	33.5
B	Width of canopy	36	91.4	30	76.2
C	Height of trim	2 ³ / ₈	6.1	2 ³ / ₈	6.1
D	Height of canopy	5	12.7	5	12.7
E	Overall height with vented installation (min.-max.)	24 ⁵ / ₈ -38 ³ / ₄	62.5-98.4	24 ⁵ / ₈ -38 ³ / ₄	62.5-98.4
	Overall height with non-vented (recirculating) installation (min.-max.)	28 ⁵ / ₁₆ -42 ⁵ / ₈	71.9-108.3	28 ⁵ / ₁₆ -42 ⁵ / ₈	71.9-108.3
F	Depth of chimney	10 ³ / ₄	27.3	10 ³ / ₄	27.3
G	Depth of canopy	19 ¹ / ₁₆	50.0	19 ¹ / ₁₆	50.0
H	Width of vent collar	6 ¹ / ₄	15.8	6 ¹ / ₄	15.8
I	Depth of vent collar	3 ³ / ₄	9.5	3 ³ / ₄	9.5
J	Width from chimney to edge of canopy	11 ⁷ / ₁₆	29.0	8 ⁷ / ₁₆	21.4


IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

36"/30" PYRAMID-STYLE WALL-MOUNT CANOPY HOODS

JXW8536DS – 36" x 24⁵/₈"-42⁵/₈" x 19¹/₁₆"

JXW8530DS – 30" x 24⁵/₈"-42⁵/₈" x 19¹/₁₆"

OPENING/CLEARANCE DIMENSIONS

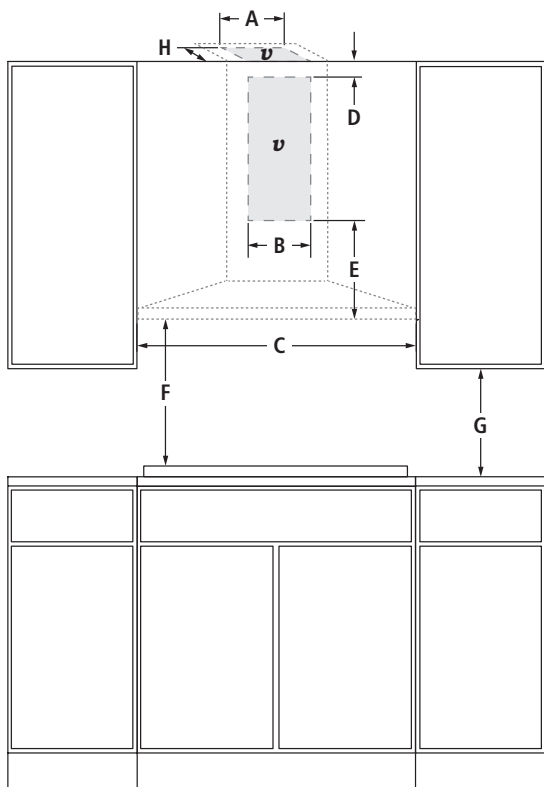

FRONT VIEW

MODEL #	JXW8736DS		JXW8530DS	
	in	cm	in	cm
A	Width of entry location for vent and power supply – ceiling option (min.-max.)			
	10-13	25.4-33.0	10-13	25.4-33.0
B	Width of entry location for vent and power supply – wall option (min.-max.)			
	10-13	25.4-33.0	10-13	25.4-33.0
C	Width of cabinet opening (min.)			
	36	91.4	30	76.2
D	Minimum height from entry location to ceiling for vent and power supply – wall option (vented installation)			
	2	5.1	2	5.1
D	Minimum height from entry location to ceiling for vent and power supply – wall option (non-vented installation)			
	9	22.9	9	22.9
E	Height from hood to entry location for vent and power supply – wall option (min.)			
	17	43.2	17	43.2
F	Suggested distance from hood to electric cooking surface (min.-max.)			
	24-36	61.0-91.4	24-36	61.0-91.4
F	Suggested distance from hood to gas cooking surface (min.-max.)			
	27-36	68.6-91.4	27-36	68.6-91.4
G	Height from upper cabinet to countertop (min.)			
	18	45.7	18	45.7
H	Depth of entry location for vent and power supply – ceiling option			
	9½	24.1	9½	24.1
v	Recommended vent and power supply entry location			

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

VENTING REQUIREMENTS

The hood is factory set for venting through the roof or wall. For non-vented (recirculating) installation, refer to recirculation kit instructions for further information.

LOCATION REQUIREMENTS

Mounting structure must be able to support 60 lb (27.2 kg).

For vented installation, the chimney can be adjusted for ceilings between 7' 1" (2.16 m) and 9' 2" (2.79 m).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 1" (2.16 m) and 9' 6" (2.90 m).

IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

