


36" LOW PROFILE WALL-MOUNT PERIMETRIC CANOPY HOOD


JXW8936DS – 36" x 33<sup>1</sup>/<sub>8</sub>"-54<sup>3</sup>/<sub>4</sub>" x 21<sup>9</sup>/<sub>16</sub>"

PRODUCT DIMENSIONS

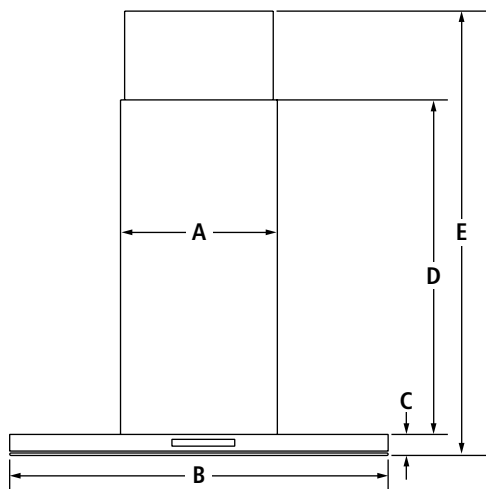


FRONT VIEW

MODEL #		JXW8936DS	
		in	cm
<b>A</b>	Width of chimney	13 <sup>1</sup> / <sub>8</sub>	33.4
<b>B</b>	Width of hood	36	91.4
<b>C</b>	Height of hood	1 <sup>5</sup> / <sub>8</sub>	4.2
<b>D</b>	Height of chimney	25 <sup>1</sup> / <sub>2</sub>	64.8
<b>E</b>	Overall height with vented installation (min.-max.)	33 <sup>1</sup> / <sub>8</sub> - 54 <sup>3</sup> / <sub>4</sub>	84.1- 139.1
<b>F</b>	Depth of chimney	12 <sup>3</sup> / <sub>8</sub>	31.4
<b>G</b>	Depth of hood	21 <sup>9</sup> / <sub>16</sub>	54.8
<b>H</b>	Vent collar diameter	6	15.2
<b>I</b>	Width from chimney to edge of hood	12 <sup>3</sup> / <sub>8</sub>	31.4

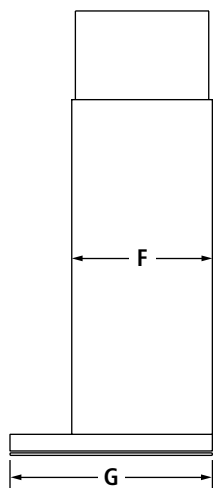

SIDE VIEW

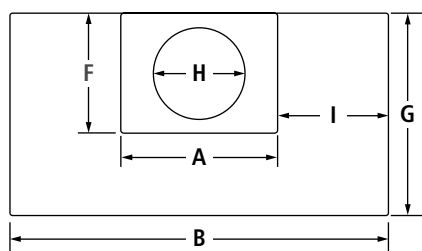


TOP VIEW

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

36" LOW PROFILE WALL-MOUNT PERIMETRIC CANOPY HOOD

JXW8936DS – 36" x 33<sup>1</sup>/<sub>8</sub>"-54<sup>3</sup>/<sub>4</sub>" x 21<sup>9</sup>/<sub>16</sub>"

OPENING/CLEARANCE DIMENSIONS

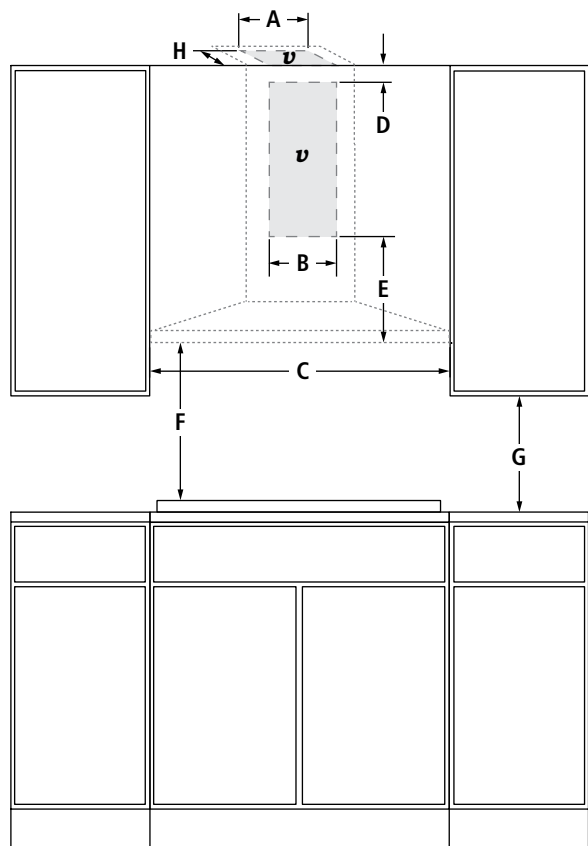

FRONT VIEW

MODEL #		JXW8936DS	
		in	cm
<b>A</b>	Width of entry location for vent and power supply – ceiling option (min.-max.)	10-13	25.4-33.0
<b>B</b>	Width of entry location for vent and power supply – wall option (min.-max.)	10-13	25.4-33.0
<b>C</b>	Width of cabinet opening (min.)	36	91.4
<b>D</b>	Minimum height from entry location to ceiling for vent and power supply – wall option (vented installation)	2	5.1
	Minimum height from entry location to ceiling for vent and power supply – wall option (non-vented installation)	9	22.9
<b>E</b>	Height from hood to entry location for vent and power supply – wall option (min.)	17	43.2
<b>F</b>	Suggested distance from hood to electric cooking surface (min.-max.)	24-36	61.0-91.4
	Suggested distance from hood to gas cooking surface (min.-max.)	30-36	76.2-91.4
<b>G</b>	Height from upper cabinet to countertop (min.)	18	45.7
<b>H</b>	Depth of entry location for vent and power supply – ceiling option	9 <sup>1</sup> / <sub>2</sub>	24.1
<b>v</b>	Recommended vent and power supply entry location		

**ELECTRICAL REQUIREMENTS**

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

**VENTING REQUIREMENTS**

The hood is factory set for venting through the roof or wall. For non-vented (recirculating) installation, refer to recirculation kit instructions for further information.

**LOCATION REQUIREMENTS**

Ceiling structure must be able to support 80 lb (36.6 kg).

For vented installation, the chimney can be adjusted for ceilings between 7' 10" (2.39 m) and 10' 4" (3.15 m).

For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 10" (2.39 m) and 10' 4" (3.15 m).

**IMPORTANT:** Dimensional specifications are provided for planning purposes only.

**Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.

All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

