



LG REFRIGERATION
LRFVS3006_
36" InstaView Door-in-Door® with Craft Ice Maker

InstaView Door-in-Door®
 Dual Ice Maker with Craft Ice™
 Inverter Linear Compressor with 10 Year Warranty
 SmartThinQ® WiFi Connectivity
 Smudge Resistant Finish
 Door Cooling +
 Measured Fill
 Flat Metal Duct Design
 Micro Surface LED
 ENERGY STAR® Qualified

AVAILABLE COLOURS

-  Smudge Resistant Stainless Steel
-  Black Stainless Steel


Enjoy new ways to control your home with LG smart appliances

- Get an alert when kids forget to close the door
- Make more ice while you're at work
- Works with the LG SmartThinQ® app

SmartThinQ®
 works with the
 Google Assistant

 WORKS WITH
 alexa

CAPACITY	REFRIGERATOR	DIMENSIONS/CLEARANCES/WEIGHTS
Refrigerator (cu.ft.) 19.3	No. of Shelves 4 Split (3 Fixed+1 Folding)	Depth with Handles 36 5/8"
Freezer (cu.ft.) 10.4	Folding Shelf 1	Depth without Handles 34 1/8"
Total Capacity (cu.ft.) 29.7	Cantilevered Shelves Yes	Depth without Door 29 7/8"
ENERGY	Shelf Construction Spill Protector™ Tempered Glass	Depth (Total with Door Open) 48 1/2"
Energy Consumption (kWh/Year) 770	Crisper Bins 2 Humidity Crisper	Height to Top of Case 68 7/8"
ENERGY STAR® Qualified Yes	Glide N' Serve™ Drawer Yes	Height to Top of Door Hinge 70 1/4"
WATER & ICE SYSTEM	Temperature Control Pantry Digital Control	Width 35 3/4"
Ice & Water Dispenser Yes	ColdSaver™ Glass Panel Yes	Width (Door Open 90° with Handle) 44 1/4"
Dispenser Type Integrated Ice & Water Dispenser	Refrigerator Light Micro Surface LED	Width (Door Open 90° without Handle) 40"
Measured Fill Yes	REFRIGERATOR DOOR	Door Edge Clearance with Handle 4 1/4"
Daily Ice Production (lbs) 3.5 lbs	InstaView Door-in-Door® Yes	Door Edge Clearance without Handle 2 1/8"
Craft Ice™ Daily Ice Production (lbs) 0.4 lbs	Door-In-Door® with ColdSaver™ Panel Yes	Installation Clearance Sides 1/8", Top 1", Back 2"
IcePlus™ Production (lbs) 3.8 lbs	Adjustable Door-in-Door® Bins Yes	Weight (Unit/Carton) 342 lbs./ 366 lbs.
Ice Storage Capacity (lbs) 3.0 lbs + 3.5 lbs	No. of Bins 8	Carton Dimensions (WxHxD) 38" x 73" x 39"
Ice System Slim SpacePlus®	Door Bin Construction 1 Piece (Clear)	LIMITED WARRANTY
Dual Ice Maker with Craft Ice Yes	FREEZER	Parts & Labor 1 Year
Dispenser Light Yes	Door Type Pull Drawer	Sealed System 7 Years
Water Filter LT1000P	Drawers 3-Tier Organization	Inverter Linear Compressor 10 Years
COOLING	DuraBase™ Solid Drawer Base Yes	
Inverter Linear Compressor Yes	Drawer Divider Yes	UPC CODES
Door Cooling+ Yes	Dual Ice Maker Yes	LRFVS3006D.ASBCNAO 048231803342
Smart Cooling Plus™ System Yes	Freezer Light Premium LED	LRFVS3006S.ASTCNAO 048231803335
Temperature Sensors 9	Freezer Handle SmartPull™ Handle	
Fresh Air Filter Yes	SMART FEATURES	
Evaporator 2	WiFi Enabled Yes	
CONVENIENCE	SmartThinQ® Yes	
Display Type Slim SpacePlus®	Works with Google Assistant, Amazon Alexa	
Temperature Controls Electronic/Digital	SmartDiagnosis™ Yes	
Door Alarm Yes	MATERIALS AND FINISHES	
Child Lock Yes	Contour Door Yes	
Auto Closing Door Hinge Yes	Hidden Hinges Yes	
ADA Compliant Yes	Surface Smooth	
Sabbath Mode Yes	Fingerprint & Smudge Resistant Exterior Yes	
LoDecibel™ Quiet Operation Yes	Handles Matching Commercial Handles	
	All Available Colors Black Stainless Steel	
	Smudge Resistant Stainless Steel	

LG REFRIGERATION

LRFVS3006

36" InstaView™ Door-in-Door® with Craft Ice


QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.



DIMENSIONS/CLEARANCES/WEIGHTS

A	Depth without Handles	34 1/8"
B	Width	35 3/4"
C	Height to Top of Case	68 7/8"
D	Height to Top of Door Hinge	70 1/4"
E	Back Clearance	2"
F	Depth without Door	29 7/8"
G	Depth (Total with Door Open)	48 1/2"
M	Depth with Handles	36 5/8"
	Width (Door Open 90° with Handle)	44 1/4"
	Width (Door Open 90° without Handle)	40"
	Door Edge Clearance with Handle	4 1/4"
	Door Edge Clearance without Handle	2 1/8"
	Installation Clearance	Sides 1/8", Top 1", Back 2"
	Carton Dimensions (WxHxD)	38" x 73" x 39"

PRODUCT DIMENSIONS

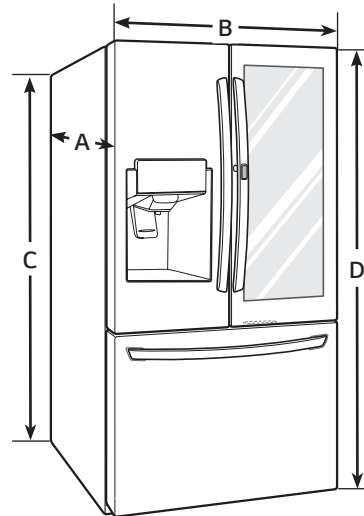

CLEARANCES

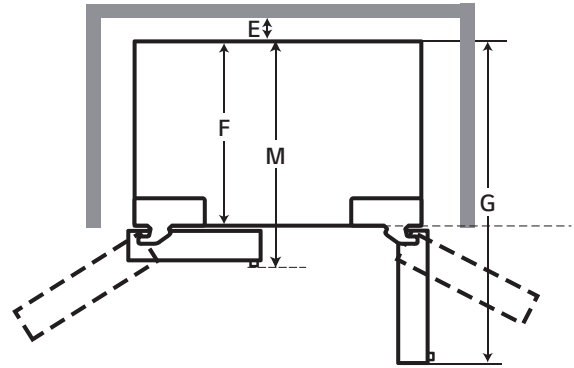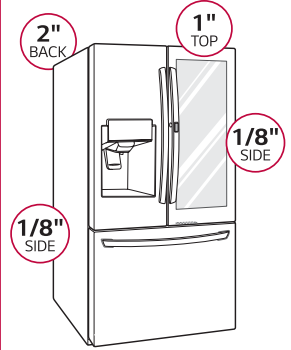

CHOOSING THE PROPER LOCATION

WATER

Select a place where a water supply can be easily connected for the automatic

NOTE

- The water pressure must be 20 – 120 psi or 138 – 827 kPa or 1.4 – 8.4 kgf/cm². If the refrigerator is installed in an area with low water pressure (below 20 psi), you can install a booster pump to compensate for the low pressure.

ELECTRICITY

The refrigerator should always be plugged into its own individual properly grounded electrical outlet rated for 115 Volts, 60 Hz, AC only, and fused at 15 or 20 amperes. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires. It is recommended that a separate circuit serving only this appliance be provided.

WARNING

- To reduce the risk of electric shock, do not install the refrigerator in a wet or damp area.

FLOORING

To avoid noise and vibration, the unit must be leveled and installed on a solidly constructed floor. If required, adjust the leveling legs to compensate for the unevenness of the floor. The front should be slightly higher than the rear to aid in door closing. Leveling legs can be turned easily by tipping the cabinet slightly. Turn the leveling legs to the left to raise the unit or to the right to lower it.

NOTE

- Installing on carpeting, soft tile surfaces, a platform or weakly supported structure is not recommended.

AMBIENT TEMPERATURE


Install this appliance in an area where the temperature is between 55°F (13°C) and 110°F (43°C). If the temperature around the appliance is too low or high, cooling ability may be adversely affected.

CONNECTING POWER AND SECURING SPACE FOR WATER SUPPLY PIPE

Make sure the location of the water supply pipe is within the marked range.

Before connecting the power, always make sure to ground the product. (If the product is not grounded, the user may be able to feel the electricity due to the minute leakage current when touching the refrigerator door handle or side corner even when there is no issue with the product.)


Do not ground the product to gas pipe, plastic water pipe or telephone wire etc. It can cause electric shock and explosion.

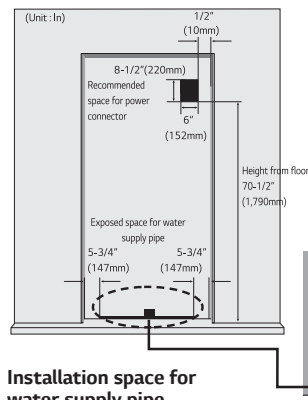

Power connection

The location of the 115V 60Hz power connector must be located on the rear side of the product as shown in the picture.

When installing the product, make sure to check whether the cord is hung on the hook on the rear side so that it is not pressed on the refrigerator. Damaged power cord can cause a fire.

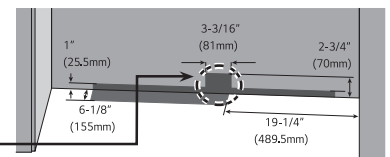

Installation space for water supply pipe

Place the water hose for ice maker and water dispenser as shown in the picture, and prepare hose to come up from the floor. (Copper pipe with diameter of 5/16" (8mm) is recommended for the water hose.) If the water pipe and water hose is located far from the product, bury the water hose on the floor and provide appropriate treatment.

