#### Prepared by

**Coast Appliances** marketing@coastappliances.com





Maytag® stainless steel french door refrigerators are built tough with strength and storage you can depend on. The PowerCold® feature gives you temperature control with the push of a button and the FreshLock™ crispers use humidity control to keep your produce full of flavor. The metal slide-out shelf gives you fast access to foods and LED lighting helps you see what you're working with. Free up shelf space in this 36inch refrigerator with the removable Store-N-Door® ice dispensing system, which is perfect for filling large containers like blenders and coolers. Also, our 10-year limited parts warranty\* on the compressor covers the heart of the fridge, so you know you can count on it to keep all your food cold for years.

# **Top Features**

PowerCold® Feature

Metal Slide-Out Shelf

Store-N-Door® Ice Dispensing System

## Manuals & Literature:

Dimension Guide Energy Guide



# Maytag® 36-Inch Wide French Door Refrigerator - 27 Cu. Ft.

MFT2772HEZ

#### **Available Finishes/Colours**



MFT2772HEZ FingerPrint Resistant Stainless Steel

Stairness Steel			
Dimensions		Specifications	
Depth	35.63	Optional Accessories	EDR2RXD1B
Height	69.88	Fingerprint Resistant	Yes
Width	35.69		
		Electrical	
Compatibility		Amps	15
Connectivity		Volts	115
Works With			
		Exterior	
Controls		Handle Color	Stainless Steel
Control Location	Exterior Dispenser	Handle Material	Metal
Control Type	Electronic	Reach Handle Type Through Handle	
Control Lockout	Yes		
Door Ajar Open Alarm	Yes	Base Grille Color	Grey
Max Cool Fast Cool	Yes	Cabinet Color	Grey
Water Filter Indicator Reset	Yes	Cabinet Finish	Textured
		Door Finish	Smooth
Specifications			
Country Of Origin	USA	_	





# **French Door Bottom Mount Refrigerator**

#### **PRODUCT MODEL NUMBER:**

MFT2772HE

#### **ELECTRICAL AND WATER REQUIREMENTS:**

**Electrical:** A 115 volt, 60 Hz, AC only 15 or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn Cooling OFF, and then disconnect the refrigerator from the electrical source. When you have finished, reconnect the refrigerator to the electrical source and turn Cooling ON. See "Using the Controls."


**Water:** A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


# **Reverse Osmosis Water Supply:**

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


#### **PRODUCT DIMENSIONS:**

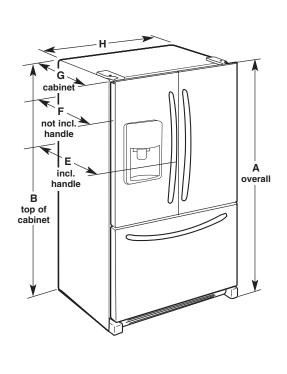

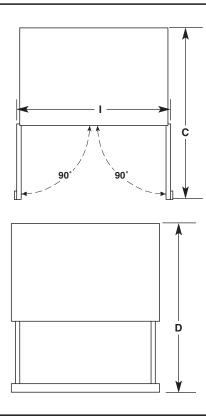

Model Number	MFT2772HE	
Model Size	27 cu. ft. (764.6 L)	
Height - Overall	70 <sup>1</sup> / <sub>8</sub> "	
"A"	(178.1 cm)	
Height - Top of	68 <sup>3</sup> / <sub>4</sub> "	
Cabinet "B"	(174.6 cm)	
Depth - Doors	48 <sup>5</sup> /8"	
Open 90° "C"	(123.5 cm)	
Depth - Drawer Open With Handle "D"	54¹/₄" (137.8 cm)	
Depth - With	36"	
Handles "E"	(91.4 cm)	
Depth - Without	33³/₄"	
Handles "F"	(85.7 cm)	
Depth - Cabinet	29 <sup>5</sup> /8"	
Only "G"	(75.2 cm)	
Width - Cabinet	35 <sup>5</sup> /8"	
Only "H"	(90.5 cm)	
Width - Door Open	38³/₅"	
90° "I"	(97.5 cm)	

## **LOCATION REQUIREMENTS:**

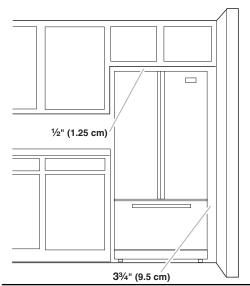

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a  $3^3/4$ " (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.