

ContourLine 60cm Convection Oven

H 6560 B



ContourLine 60cm Convection Oven H 6560 B



H 6560 B




Features:

- SensorTronic controls: 5-line TFT display with laterally positioned sensor controls that clearly present menu content.
- PerfectClean interior makes for easy clean-up
- Oven 35% larger cavity than Generation 4000
- 17 Operating Modes
- Favorites - up to 20 recipes
- MasterChef menu offers over 100 food types to cook to perfection
- Roast Probe for perfect roasting results
- Rapid PreHeat
- CleanGlass Door
- Timer
- ComfortSwivel Handle moves with the motion of your wrist, creating a more ergonomic feel when opening and closing the oven door

Comfort Handle:

Optional with ContourLine

(DS 6708 Item #09828380)



ComfortSwivel Handle:

Standard with ContourLine

Optional for PureLine


(DS 6718 Item # 09828390)

Silhouette Handle:

Standard with Pureline

Optional for Contourline

(DS 6808 Item # 09828400)



Silhouette Handle (Chrome):

Standard with BrilliantWhite

(DS 6808 Item # 09828410)



Silhouette Handle:

Standard with Truffle Brown

(DS 6808 Item # 09870690)

ContourLine 60cm Convection Oven

H 6560 B




SPECIFICATIONS	
H 6560 B— Item 22656052USA	
Overall Unit Width - Excluding Fascia Dimension	21 ¹¹ / ₁₆ " (551mm)
Overall Height - Excluding Fascia Dimension	22 ¹¹ / ₁₆ " (576mm)
Overall Depth- Excluding Fascia Dimension	21 ¹ / ₂ " (546mm)
Oven Door Clearance	18 ¹ / ₂ " (470mm)
Overall Fascia Dimensions	23 ⁷ / ₁₆ " (596mm) W x 23 ⁷ / ₁₆ " (596mm) H x 7 ⁷ / ₈ " (23mm) D
Built-In	
Minimum Cabinet Width	22 ¹ / ₁₆ " (560mm)
Minimum Cabinet Depth	21 ⁵ / ₈ " (550mm)
Minimum Cabinet Opening Height	23 ⁵ / ₈ " (600mm)
Minimum Base Support	100 lbs
Additional Cut-outs Required	Yes Cut-out (4" x 22" / 10 cm x 560 cm) in the bottom of the cabinet for powercord and ventilation
Electrical	
Electrical Requirements	208/240V 20A 60Hz circuit
Power Cord	Yes - NEMA 14-30 plug
Cut Out for Power Cord	Yes
Electrical Rating	120/240V 30A 60Hz 4200w 120/208V 60Hz 3200w
Total Amps	(240V) 17.5A / (208V) 15.4A
Shipping	
Shipping Weight	109 lbs
Shipping Dimensions	26 ³ / ₈ " W x 29 ⁵ / ₁₆ " H x 27 ³ / ₁₆ " L
Support	
Call	800.843.7231
20/20	2020technologies.com

ContourLine 60cm Convection Oven H 6560 B




PRODUCT VIEWS

Front View

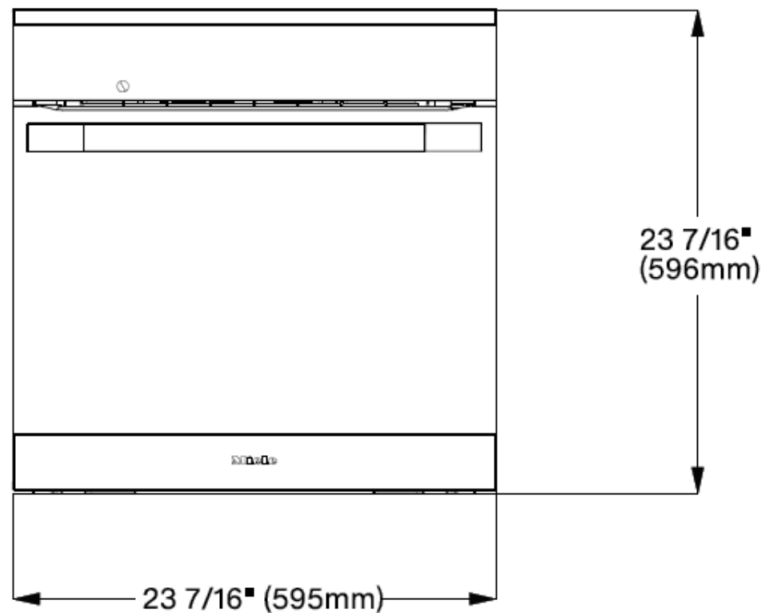

Front Side with Door Swing

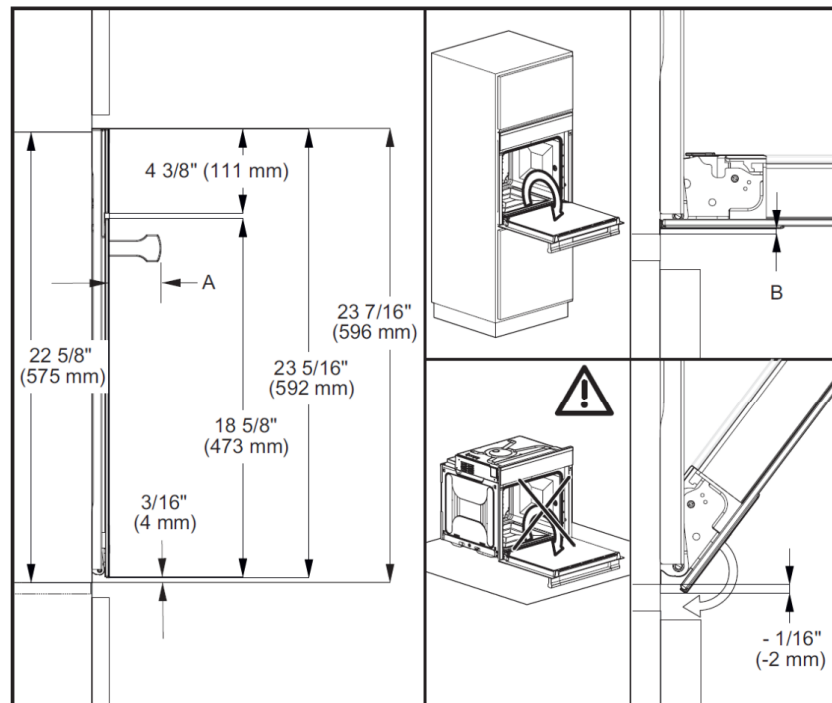


- A** H65xx: 2.75" (69 mm)
- B** Oven with glass front: .08" (2.2 mm)
Oven with metal front: .05" (1.2 mm)

ContourLine 60cm Convection Oven H 6560 B




PRODUCT VIEWS

Isometric View

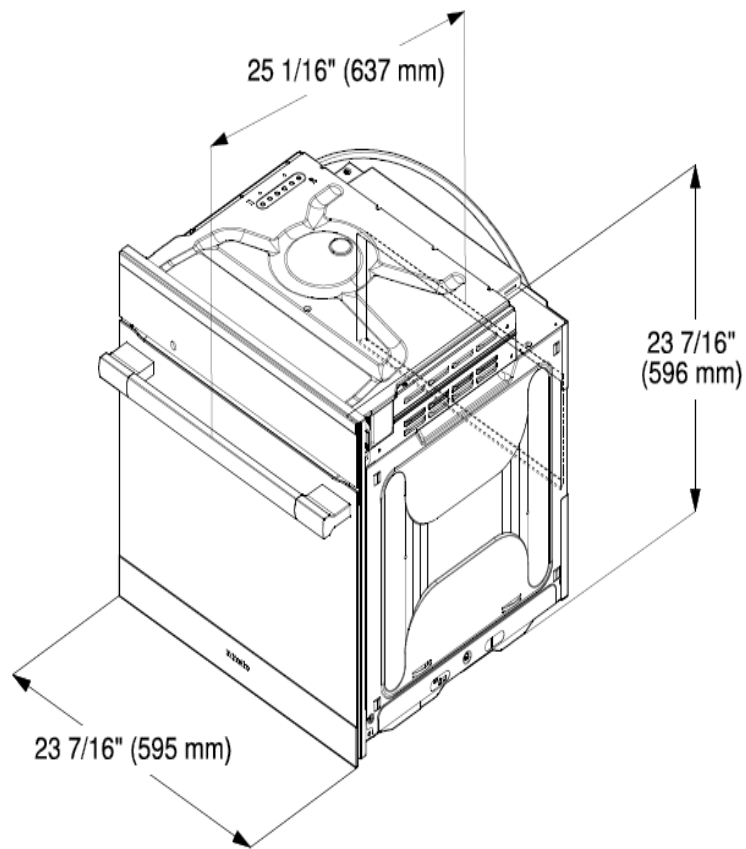

Top View

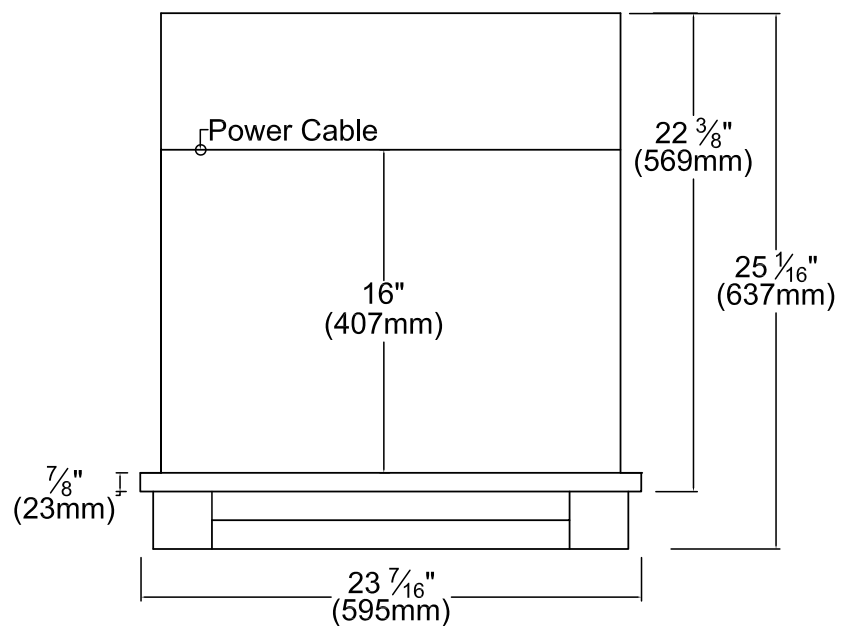


ContourLine 60cm Convection Oven H 6560 B




PRODUCT VIEWS

Rear View

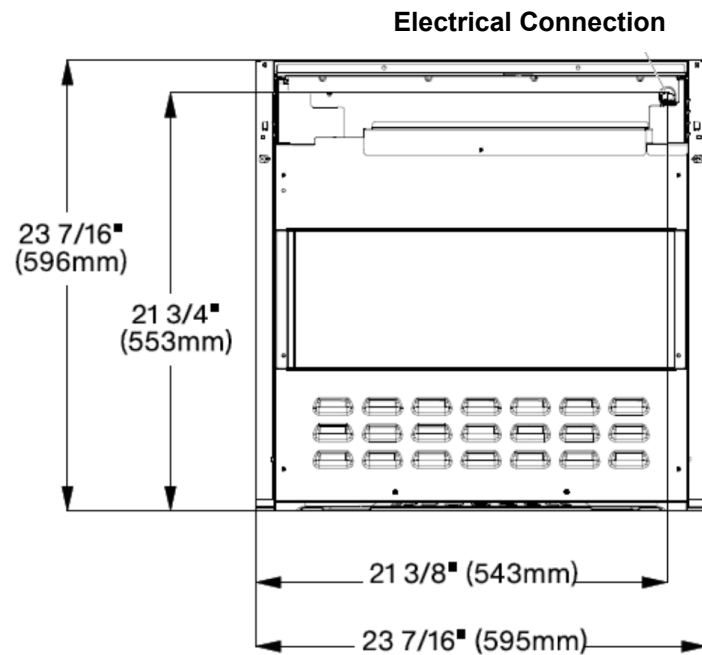

INSTALLATION SPECIFICATIONS

Side View with Door Open

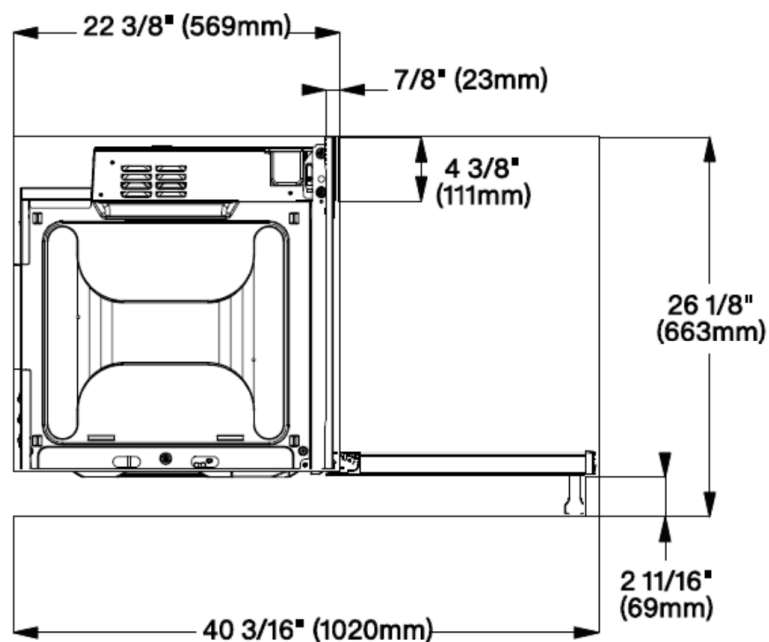


ContourLine 60cm Convection Oven H 6560 B



INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

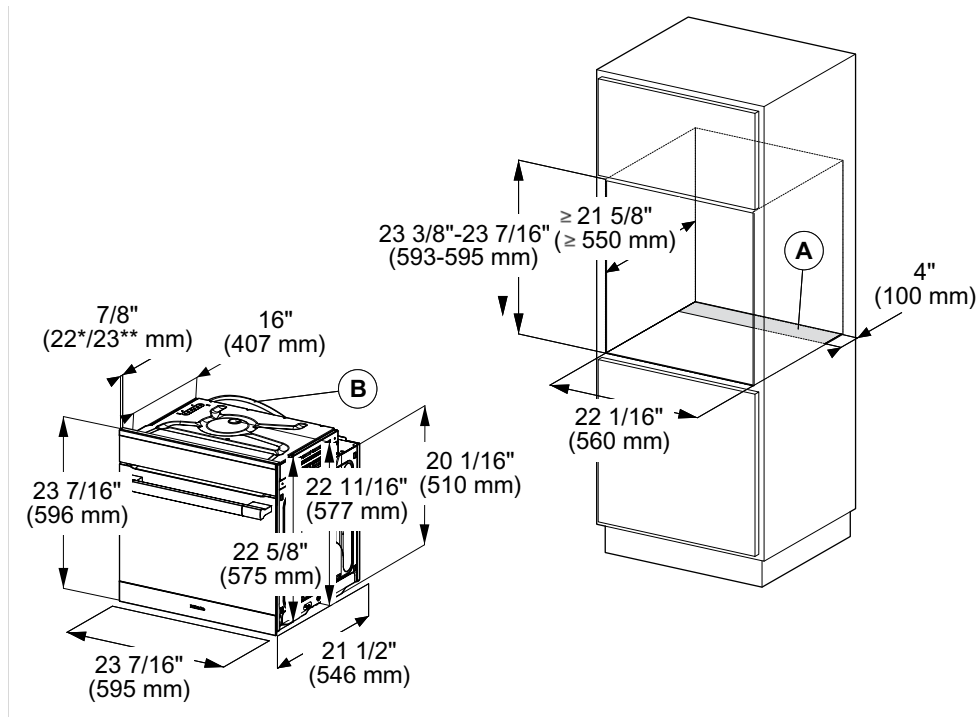


- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- * Oven with glass front
- ** Oven with metal front

ContourLine 60cm Convection Oven H 6560 B



INSTALLATION SPECIFICATIONS

Undercounter Installation

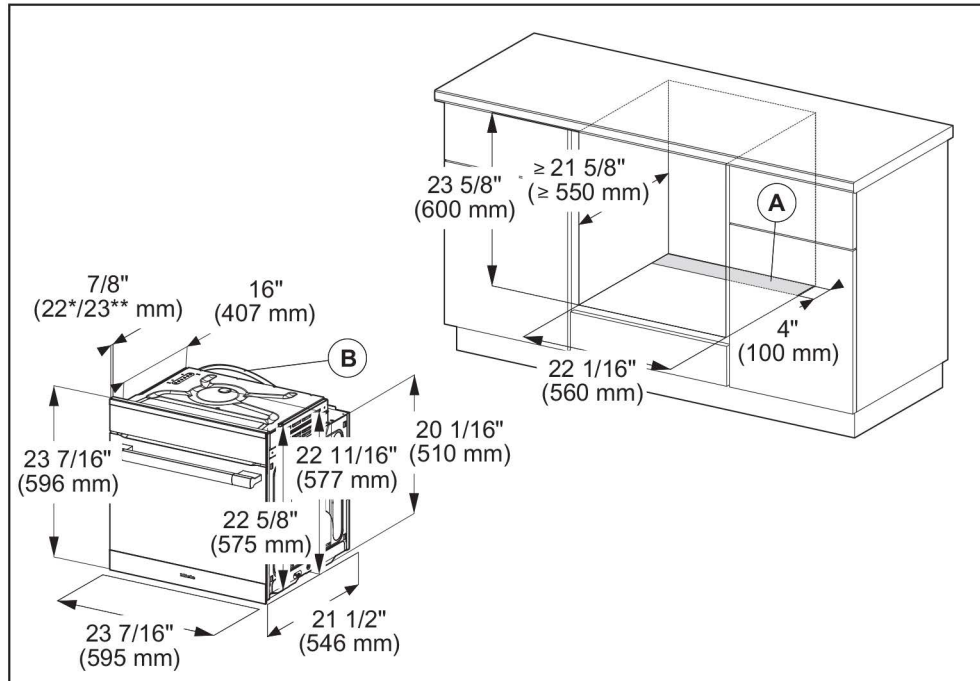

- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- * Oven with glass front
- ** Oven with metal front


70cm Trim Kit

EBA 6767



INSTALLATION SPECIFICATIONS

Installation In Tall Niche

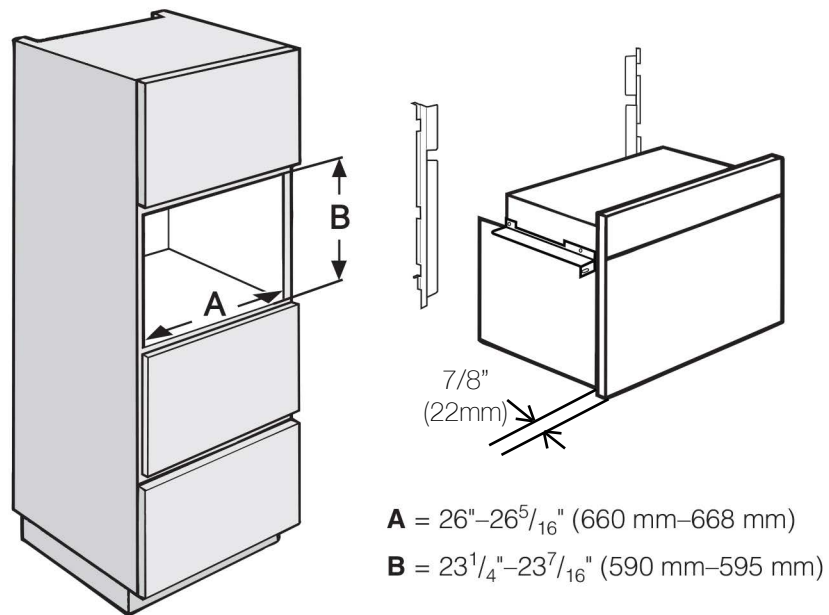

INSTALLATION SPECIFICATIONS

Installation above 70cm Oven

