



36" CUSTOM HOOD LINER

JXL6536CSS – 35<sup>7</sup>/<sub>8</sub>" x 11<sup>1</sup>/<sub>2</sub>" x 22"


PRODUCT DIMENSIONS

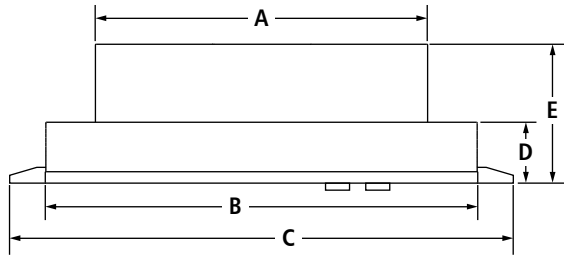

FRONT VIEW



SIDE VIEW

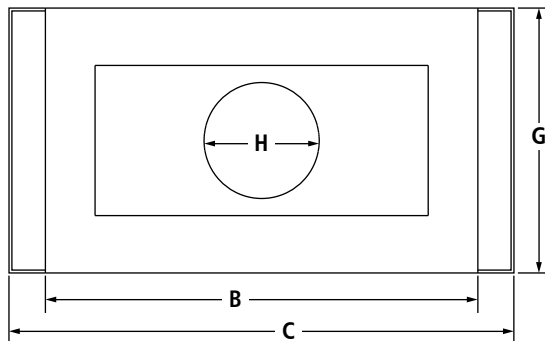

TOP VIEW

MODEL #		JXL6536CSS	
		in	cm
<b>A</b>	Width of upper portion of hood liner	27 <sup>5</sup> / <sub>8</sub>	70.1
<b>B</b>	Overall width	35 <sup>7</sup> / <sub>8</sub>	91.1
<b>C</b>	Overall width with extension panel kit		
	36" to 42" extension panel kit*	41 <sup>7</sup> / <sub>8</sub>	106.4
	36" to 48" extension panel kit**	47 <sup>7</sup> / <sub>8</sub>	121.6
<b>D</b>	Height from hood liner to hood support	5 <sup>1</sup> / <sub>16</sub>	12.8
<b>E</b>	Overall height	11 <sup>1</sup> / <sub>2</sub>	29.2
<b>F</b>	Depth of upper portion of hood liner	12 <sup>3</sup> / <sub>8</sub>	31.4
<b>G</b>	Overall depth	22	55.9
<b>H</b>	Vent collar diameter	10	25.4

\*Requires optional 36" to 42" extension panel kit – W10646268.



\*\*Requires optional 36" to 48" extension panel kit – W10646269.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

36" CUSTOM HOOD LINER

JXL6536CSS – 35<sup>7</sup>/<sub>8</sub>" x 11<sup>1</sup>/<sub>2</sub>" x 22"

OPENING/CLEARANCE DIMENSIONS

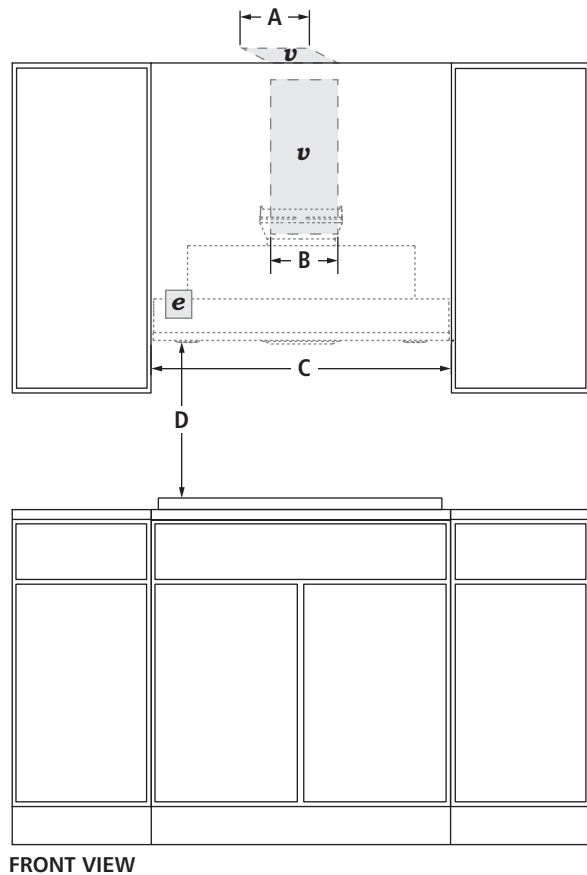

CUTOUT VIEW

**ELECTRICAL REQUIREMENTS**

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

**VENTING REQUIREMENTS**

An internal or in-line (external) blower motor system is required. The hood is factory set for venting through the roof or wall. Do not terminate the vent in an attic or other enclosed area.

**LOCATION REQUIREMENTS**

Custom built enclosure with hood liner support. Hood support must be able to support 75 lb (34.0 kg).

MODEL #		JXL6536CSS	
		in	cm
A	Width of vent entry location – ceiling option (min.-max.)	10	25.4
B	Width of vent entry location – wall option (min.-max.)	10	25.4
C	Width of cabinet opening – hood liner only (min.)	36	91.4
	Width of cabinet opening – hood liner plus 36" to 42" extension panel kit* (min.)	42	106.7
	Width of cabinet opening – hood liner plus 36" to 48" extension panel kit** (min.)	48	121.9
D	Suggested distance from hood to electric cooking surface (min.-max.)	24-36	61.0-91.4
	Suggested distance from hood to gas cooking surface (min.-max.)	30-36	76.2-91.4
E	Distance from centerline to cutout for hood liner	14	35.5
F	Width of cutout for hood liner	28	71.1
G	Depth from cutout to wall	4½	11.4
H	Depth of cutout for hood liner	13	33.0
e	Terminal box location		
v	Recommended vent entry location		

\*Requires optional 36" to 42" extension panel kit – W10646268.

\*\*Requires optional 36" to 48" extension panel kit – W10646269.

**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.