



Whirlpool® 36-Inch Wide French Door Refrigerator - 25 cu. ft.

WRX735SDHW

Available Finishes/Colours

<input type="checkbox"/> WRX735SDHW White	<input type="checkbox"/> WRX735SDHZ FingerPrint Resistant Stainless Steel
<input type="checkbox"/> WRX735SDHV Black Stainless	<input type="checkbox"/> WRX735SDHB Black

Get the storage you need in this refrigerator with water dispenser. An exterior refrigerated drawer keeps frequently used items within easy reach. This ENERGY STAR® certified refrigerator with LED lighting also gives you access to filtered ice and water without ever opening the door. Tap Touch controls are also as easy to clean as they are to use.

Top Features

Refrigerated Exterior Drawer

Tap Touch Controls

Exterior Ice and Water Dispenser with EveryDrop™ Filtration

Manuals & Literature:

[Dimension Guide](#) [Energy Guide](#)

[Owner Manual](#) [Warranty Information](#)

Dimensions		Specifications	
Depth	34.63	Fingerprint Resistant	No
Height	70.13	Electrical	
Width	35.63	Amps	20
Compatibility		Volts	115
Connectivity		Exterior	
Works With		Handle Color	White
Controls		Handle Material	Metal
Control Location	Exterior Dispenser	Handle Type	Reach Through Handle
Control Type	Electronic	Base Grille Color	White
Control Lockout	Yes	Cabinet Color	White
Door Ajar Open Alarm	Yes	Cabinet Finish	Textured
Max Cool Fast Cool	Yes	Door Finish	Smooth
Water Filter Indicator Reset	Yes	Door Style	Contour
Specifications		Hidden Hinge	Yes
Country Of Origin	USA	Number Of Doors	4
Optional Accessories	W10346771A	Reversible Door	No



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRX735SDB WRX735SDH

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.


IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

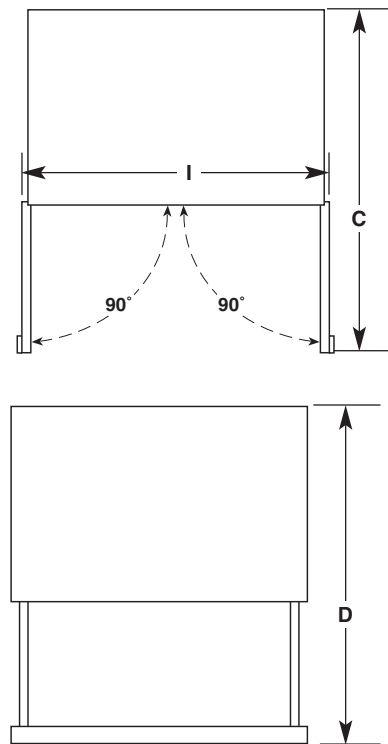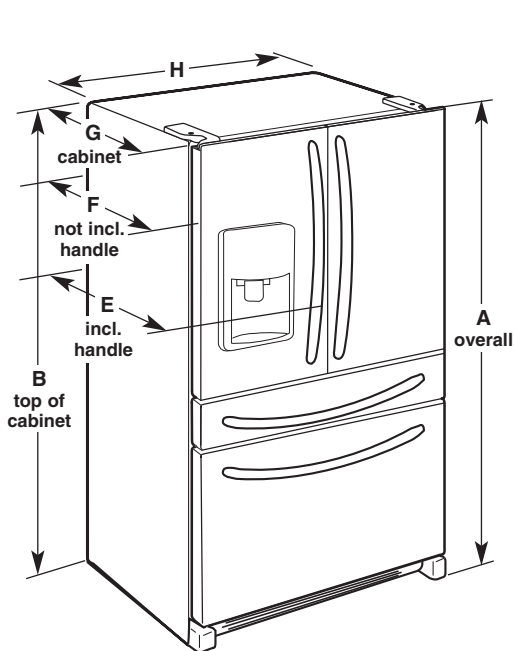

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRX735SDB	24.7 cu. ft.	70 ¹ / ₈ " (178.1 cm)	68 ⁵ / ₈ " (174.3 cm)	48" (121.9 cm)	52 ³ / ₈ " (133.0 cm)	34 ³ / ₄ " (88.3 cm)	32 ¹ / ₈ " (81.6 cm)	29" (73.6 cm)	35 ⁵ / ₈ " (90.5 cm)	41" (104.1 cm)
WRX735SDH	24.5 cu. ft.	70 ¹ / ₈ " (178.1 cm)	68 ⁵ / ₈ " (174.3 cm)	48" (121.9 cm)	52 ³ / ₈ " (133.0 cm)	34 ⁵ / ₈ " (87.9 cm)	32 ¹ / ₈ " (81.6 cm)	29" (73.6 cm)	35 ⁵ / ₈ " (90.5 cm)	41" (104.1 cm)

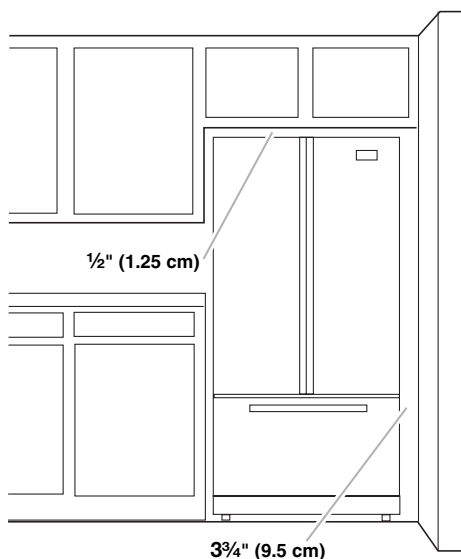

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 3 3/4" (9.5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).