



7.4 cu. ft. Large Capacity Electric Dryer

YWED7500GC

Available Finishes/Colours

Dimensions		Configuration and Overview	
Depth	30	Fuel Type	Electric
Height	39 5/8	Flat Back	No
Width	27		
Controls		Appearance	
Automatic Temperature Controls	Yes	Door Style	Hamper
Feedback-Status Indicators	Check Lint Screen, Cool Down, Damp, Done, Estimated Time Remaining, Sensing	Window	Yes
Electronic Display Type	Digital	Reversible Door	No
End of Cycle Signal	Yes	Exterior	
Control Type	Electronic Touch	Door Style	Hamper
Control Location	Rear Panel	Window	Yes
		Door Opening	Drop Down
		Reversible Door	No
Misc.			
		Accessory Relationships	Yes
		Home Delivery	Yes
		Will Call	Yes
Details			
		Motor Horsepower	1/3 HP

Help prevent overdrying with the AccuDry™ sensor technology in this top load dryer. You can choose from more cycles with easy-to-use Intuitive Touch Controls that provide the right kind of care for whatever you're drying in this top load dryer.

Top Features

AccuDry™ Sensor Drying Technology

Intuitive Touch Controls



Sanitize Cycle

Manuals & Literature:


-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Installation Guide](#)
-  [Owner Manual](#)
-  [Warranty Information](#)



Electric and Gas Dryers

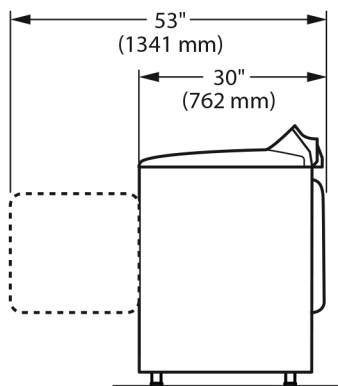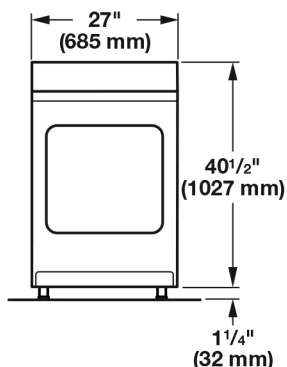

A. Wide opening side-swing door

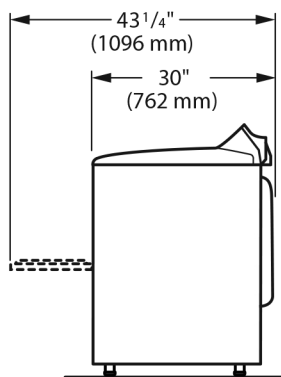


B. Wide opening hamper door

*Most installations require a minimum 6" (152 mm) clearance behind the dryer for the exhaust vent with elbow. See "Venting Requirements."

Spacing for recessed area or closet installation

The dimensions shown are for the recommended spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

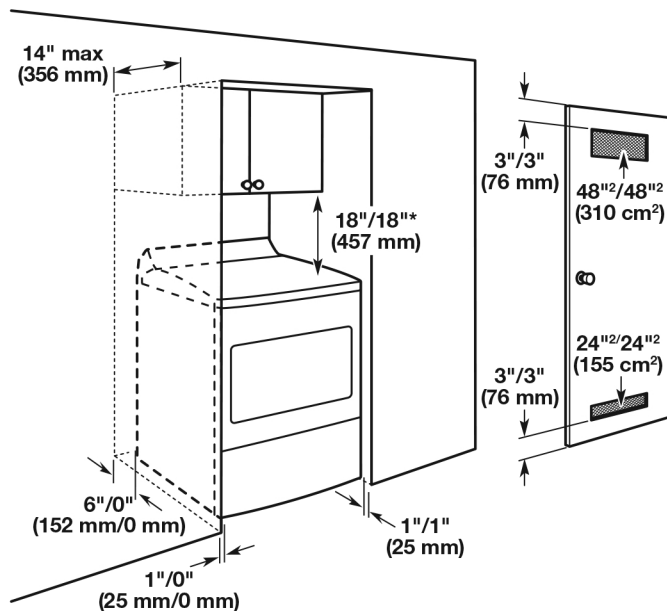

Recommended/Minimum spacing

ELECTRICAL REQUIREMENTS

- To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit.
- Do not use an extension cord.
- 120 Volt, 60 Hz, AC only, 15- or 20- amp fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is also recommended that a separate circuit serving only this dryer be provided.

VENTING REQUIREMENTS

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use following Vent System Chart to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in the Vent System Chart. Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

The Vent System Chart provides venting requirements that will help achieve best drying performance.

Vent System Chart			
Number of 90° elbows	Type of vent	Box/louvered hoods	Angled hoods
0	Rigid metal	64 ft. (20 m)	58 ft. (17.7 m)
1	Rigid metal	54 ft. (16.5 m)	48 ft. (14.6 m)
2	Rigid metal	44 ft. (13.4 m)	38 ft. (11.6 m)
3	Rigid metal	35 ft. (10.7 m)	29 ft. (8.8 m)
4	Rigid metal	27 ft. (8.2 m)	21 ft. (6.4 m)

NOTE: Bottom exhaust installations have a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.