

# 48" DUAL FUEL RANGE - 4 BURNERS, INFRARED CHARBROILER AND INFRARED GRIDDLE



DF48450CG/S/P



## FEATURES

Wolf's patented gas dual-stacked, sealed burner design provides precise high-to-low temperature control and a spark ignition system that reignites the burner automatically

Wolf's Dual VertiCross™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Ten cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm, were developed by Wolf chefs to maximize the performance of your oven

The adjustable 16,000 Btu infrared charbroiler features a high and low setting, aptly handling a range of foods from steaks and burgers to delicate fish fillets and vegetables

The redesigned 15,000 Btu griddle features even, precise heat, handling breakfast with equal finesse as seared burgers and stir-fried vegetables

Four dual-stacked burners produce up to 20,000 Btu for fast boils and intense sears and 300 Btu for true simmers and worry-free melts

For improved temperature control and safety, the spark ignition system reignites burners automatically

The full-color touch screen is intuitive and easy to read, discreetly hiding away when not in use

LED backlit control knobs illuminate when in use, indicating which burners are active

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature

The oven's Wi-Fi enabled feature lets you remotely preheat, select modes, and adjust oven temperature from your mobile device

Create a cohesive look in your kitchen with the range's stainless steel construction, pro style handles, and choice of iconic red, black, or brushed stainless knobs

## ACCESSORIES

11" Cutting Board

18" Broiler Pan

18" Full-Extension Ball-Bearing Oven Rack

18" Standard Oven Rack

2-Burner Wok Grate

30" Broiler Pan

30" Full-Extension Ball-Bearing Oven Rack

30" Premier Baking Sheet

30" Standard Oven Rack

48" and 60" Dual Fuel Black Knobs

48" and 60" Dual Fuel Stainless Steel Knobs


Bake Stone Kit



## KNOB OPTIONS



## TOP CONFIGURATION

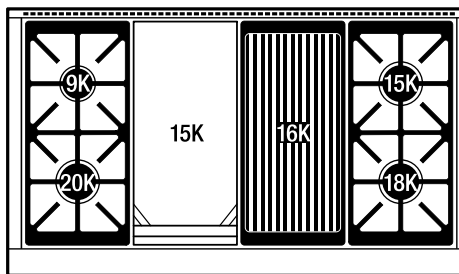

## RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 1 - 15,000 Btu burner
- 1 - 18,000 Btu burner
- 1 - 20,000 Btu burner
- 1 - 16,000 Btu charbroiler
- 1 - 15,000 Btu griddle
- Stainless-steel charbroiler and griddle covers
- Stainless-steel island trim riser included

Filler Trim  
Griddle Cleaning Kit  
Griddle Cleaning Pads  
Griddle Cleaning Solution  
Temperature Probe  
30" Black Knobs  
30" Red Knobs  
30" Stainless Steel Knobs  
36" Black Knobs  
36" Red Knobs  
36" Stainless Steel Knobs  
48" and 60" Black Knobs  
48" and 60" Red Knobs  
48" and 60" Stainless Steel Knobs  
2 1/2" Rear Caster Covers  
3" Rear Caster Covers  
3 1/2" Rear Caster Covers  
4" Rear Caster Covers  
4 1/2" Rear Caster Covers  
3 3/4" (95) Front Leg Covers  
3 1/2" Front leg covers  
4" Front leg covers  
4 1/2" Front leg covers  
2 1/2" Stainless Steel Kickplate  
3" Stainless Steel Kickplate  
3 1/2" Stainless Steel Kickplate  
4" Stainless Steel Kickplate  
4 1/2" Stainless Steel Kickplate  
2 1/2" Stainless Steel Kickplate  
3" Stainless Steel Kickplate  
3 1/2" Stainless Steel Kickplate  
4" Stainless Steel Kickplate  
4 1/2" Stainless Steel Kickplate  
2 1/2" Stainless Steel Kickplate  
3" Stainless Steel Kickplate  
3 1/2" Stainless Steel Kickplate  
4" Stainless Steel Kickplate  
4 1/2" Stainless Steel Kickplate  
2 1/2" Stainless Steel Kickplate  
3" Stainless Steel Kickplate  
3 1/2" Stainless Steel Kickplate  
4" Stainless Steel Kickplate  
4 1/2" Stainless Steel Kickplate

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

5" and 10" stainless steel risers, and 20" riser with shelf

---

Signature red, black or stainless steel control knobs

---

Rear Caster Covers

---

Front Leg Extension Covers

---

Stainless Steel Kickplates

---

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer.

For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).

---


Specifications are subject to change without notice. This information was generated on January 1, 2021. Verify specifications prior to finalizing your cabinetry/enclosures.

**PRODUCT SPECIFICATIONS**

Model	DF48450CG/S/P
Dimensions	47 7/8"W x 36 1/2"H x 29 1/2"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 20"D
Oven 2 Interior Dimensions	13 1/4"W x 17 1/2"H x 19 3/4"D
Oven 1 Usable Capacity	1.8 cu. ft.
Oven 1 Overall Capacity	2.7 cu. ft.
Oven 2 Usable Capacity	3.2 cu. ft.
Oven 2 Overall Capacity	5.1 cu. ft.
Door Clearance	19 1/2"
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female


**ELECTRICAL**

**GAS**

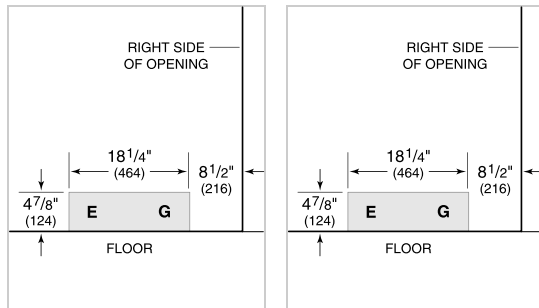


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

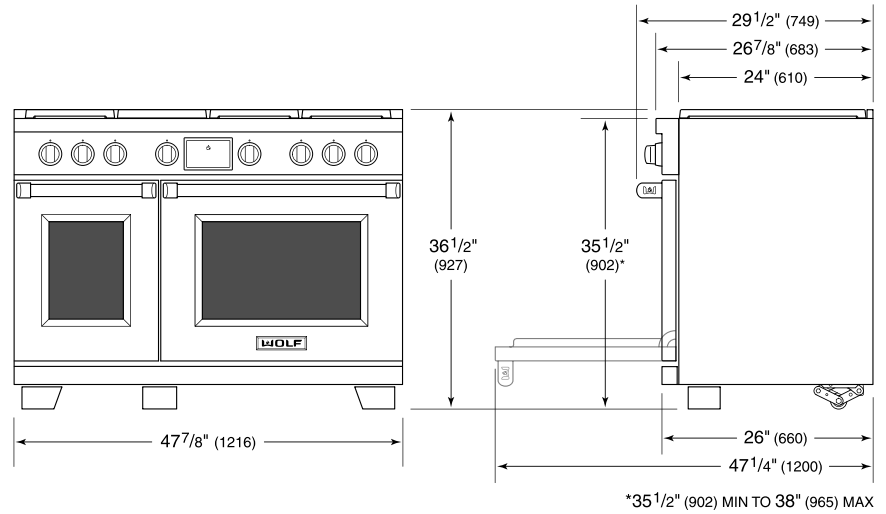

**STANDARD INSTALLATION**

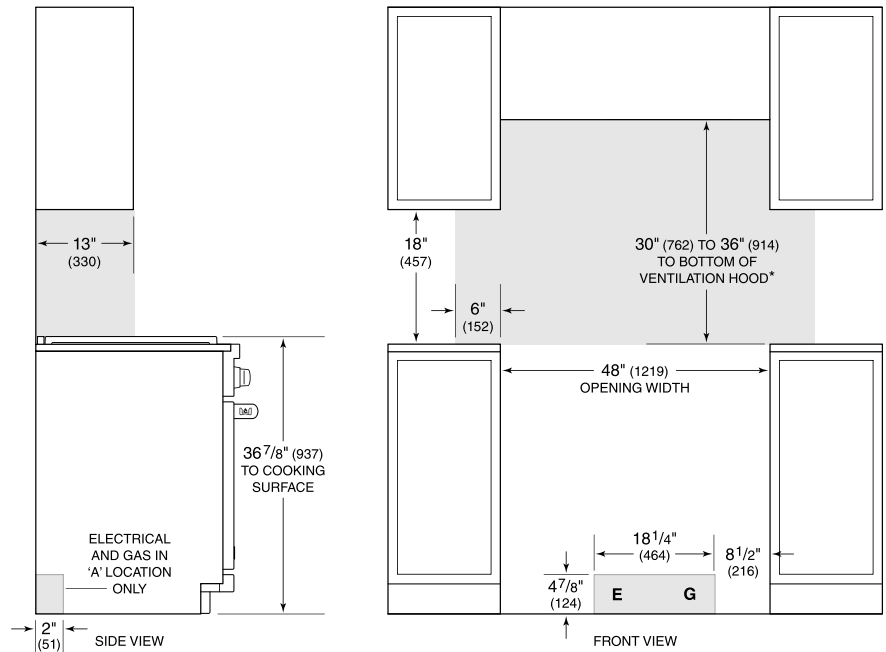

*\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler.*

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*

*For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*