

GR364G



## FEATURES

- 4 dual-stacked burners plus 15,000 Btu infrared griddle
- Convection oven for faster, more consistent cooking
- Dual-stacked, sealed burners for higher highs, lower lows
- Infrared broiler inside oven sears quickly and evenly
- Heavy-gauge stainless steel
- Continuous cast-iron grates for easy movement of pots and pans
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Spark ignition system re-ignites when flame goes out
- Adjustable legs for stability, plus rear casters

## ACCESSORIES

- 11" Cutting Board
- Bake stone kit (stone, rack and peel)
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Full-extension easy glide oven rack
- Cast iron S-grates and wok grate
- Stainless steel kickplate
- Signature red, black or stainless steel control knobs
- Front leg covers
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## KNOB OPTIONS



## TOP CONFIGURATION

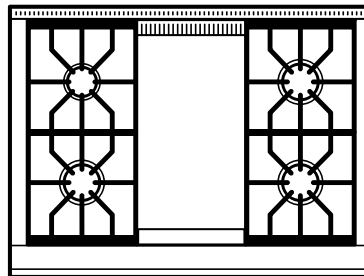


## RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 3 - 15,000 Btu Burners
- 1 - 15,000 Btu (13,000 Btu LP) Griddle

**PRODUCT SPECIFICATIONS**


|                            |                            |
|----------------------------|----------------------------|
| Model                      | GR364G                     |
| Dimensions                 | 35 7/8"W x 37"H x 28 3/8"D |
| Oven 1 Interior Dimensions | 30"W x 18 5/8"H x 17"D     |
| Oven 1 Usable Capacity     | 3.7 cu ft                  |
| Oven 1 Overall Capacity    | 5.5 cu ft                  |
| Door Clearance             | 19 1/2"                    |
| Weight                     | 470 lb                     |
| Electrical Supply          | 110/120 VAC, 50/60 Hz      |
| Electrical Service         | 15 amp dedicated circuit   |
| Gas Supply                 | 3/4" rigid pipe            |
| Gas Inlet                  | 1/2" NPT female            |
| Receptacle                 | 3-prong grounding-type     |

**DIMENSIONS**

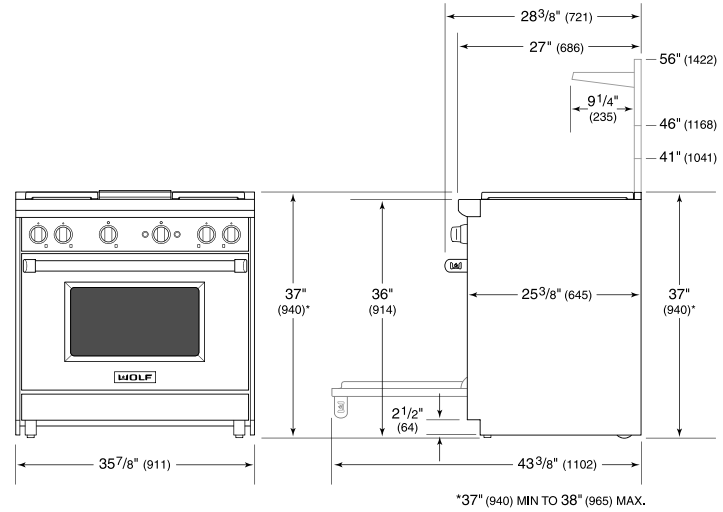


**ELECTRICAL**

**GAS**

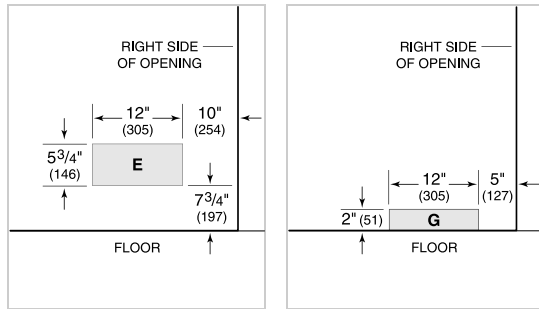

**STANDARD INSTALLATION**

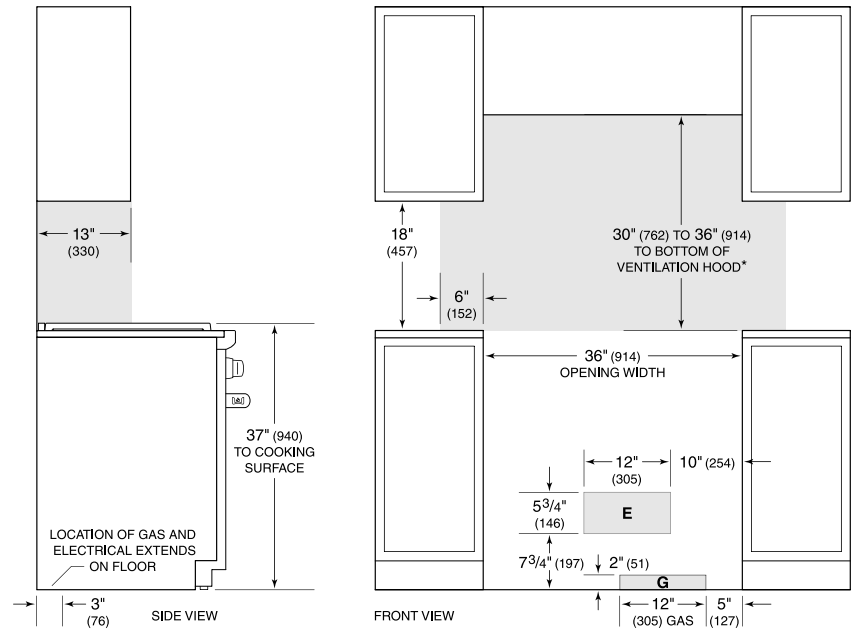

*\*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charcoal requires non-combustible materials.  
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*