SC(B)514 | ALITO Collection









Wall Mount

The SC(B)514 makes a statement of strength and power with a bold frame and 550 CFM fan. Features mesh or baffle filters, two bright LED lights and a three-speed panel for total control. It is also fitted with a time-delay OFF feature up to nine minutes.

Green Features



3 Speed Push Button Control Panel



Time-Delay
OFF Feature



Long-Lasting LED Lights



Grease Cup




Model	Colour	Ducting	Filters	Size	CFM
SC51424	Stainless Steel	6"	Mesh	24"	550
SC51430	Stainless Steel	6"	Mesh	30"	550
SC51436	Stainless Steel	6"	Mesh	36"	550
SCB51424	Stainless Steel	6"	Baffle	24"	550
SCB51430	Stainless Steel	6"	Baffle	30"	550
SCB51436	Stainless Steel	6"	Baffle	36"	550


SC(B)514 | ALITO Collection



Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- Plug-in connection

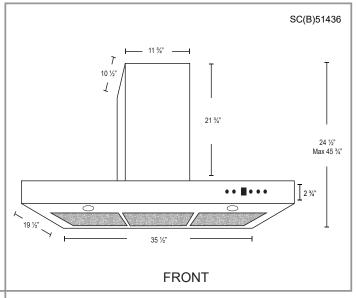



Options

Filters:

SC514 - Quick Release Aluminum

Mesh Filters

SCR514 - Quick Release Steinless S

SCB514 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

B2.CH16 - short (7'-8' ceilings)

B2.CH22 - standard (8'-9' ceilings)

B2.CH32 - extended (9'-11' ceilings)

• Widths: 24", 30", 36"

Specifications

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

• Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

· Ducting: 6" Round

· Noise Level: Min. 2 Sones

Max. 6 Sones

